

ZYH\ZYHC\DH 系列 ZYH\ZYHC\DH Series

远红外电焊烘干箱

FAR-INFRARED ELECTRODE DRYING CABINET(OVEN)



采用远红外辐射加热，温度数字显示，最高温度500℃，内腔及分层抽屉均采用不锈钢结构，具有自动控温，定时烘干等功能。DH-02、ZYHC系列另设焊条保温贮藏箱，既烘干又保温，提高设备周转利用率。是焊材库及施工现场必备的烘干设备。

Far-infrared radiation heating is adopted. Digital display of temperature and time. Stainless steel structure is adopted by both inner cavity and deked-drawers to maintain automatic temperature controlling regular drying and insulating and to enhance the turnover availability rate of the equipment. it also absolutely necessary drying equipment for welding materials warehouse and construction sites.

控温时间Temp.time 1-999分/min 温度指示等级0.5-1.0



型号 Model	输入电压 Input Voltage	额定功率 Rated Power	最高温度 Max. Temperature	焊条容量 Electrode Capacity	温度均匀性 Evenness of Temperature	焊条长度 Electrode Length	机身外形尺寸 External Dimension (L×W×H)	焊条存放形式 Electrode storage way	重量 Weight	备注 Remarks
ZYD-10	AC220V/50Hz	1.2 KW	500℃	10kg	±10℃	450mm	31×46×88cm	托盘 (Tray)	41kg	
ZYH-10	AC220V/50Hz	1.6KW	500℃	10kg	±10℃	450mm	62×77×44cm	抽屉式 Drawer type	54kg	
ZYH-20	AC220V/50Hz	2.5KW	500℃	20kg	±10℃	450mm	80×44×82cm		78kg	
ZYH-30	AC220V/50Hz	3KW	500℃	30kg	±10℃	450mm	80×52×100cm		108kg	
ZYH-40	AC220V/50Hz	3KW	500℃	40kg	±10℃	450mm	80×52×105cm		115kg	
ZYH-60	AC220V/50Hz	3.6KW	500℃	60kg	±10℃	450mm	80×62×105cm		123kg	
ZYH-100	AC220V/50Hz	7.2KW	500℃	100kg	±10℃	450mm	80×62×145cm		165kg	
ZYHC-20	AC220V/50Hz	3.3KW	500℃	20kg	±10℃	450mm	80×44×108cm	堆板式 Stack type	106kg	带贮藏箱 With Storage Container
ZYHC-30	AC220V/50Hz	3.8KW	500℃	30kg	±10℃	450mm	80×52×133cm		140kg	
ZYHC-40	AC220V/50Hz	3.8KW	500℃	40kg	±10℃	450mm	80×52×138cm		150kg	
ZYHC-60	AC220V/50Hz	4.6KW	500℃	60kg	±10℃	450mm	80×62×144cm		172kg	
ZYHC-100	AC380V/50Hz	7.2KW	500℃	100kg	±10℃	450mm	101×77×143cm	堆板式 Stack type	290kg	带贮藏箱 With Storage Container
ZYHC-150	AC380V/50Hz	7.2KW	500℃	150kg	±10℃	450mm	106×77×143cm		300kg	
DH-60-2	AC380V/50Hz	3.6KW	500℃	60kg	±10℃	450mm	96×77×137cm	抽屉式 Drawer type	250kg	带贮藏箱 With Storage Container
DH-100-2	AC380V/50Hz	7.2KW	500℃	100kg	±10℃	450mm	101×77×143cm		290kg	
DH-200-2	AC380V/50Hz	7.2KW	500℃	200kg	±10℃	450mm	111×77×143cm	堆板式 Stack type	320kg	带贮藏箱 With Storage Container
DH-500-2	AC380V/50Hz	9KW	500℃	500kg	±10℃	450mm	140×77×178cm		450kg	
DH-500F	AC380V/50Hz	9KW	500℃	500kg	±10℃	450mm	140×120×180cm	堆板式 Stack type	480kg	带贮藏箱 With Storage Container
DH-1000	AC380V/50Hz	13.5KW	500℃	1000kg	±10℃	700mm	170×80×220cm	堆板式 Stack type	700kg	带贮藏箱 With Storage Container
DH-1000F	AC380V/50Hz	13.5KW	500℃	1000kg	±10℃	700mm	170×80×220cm		700kg	
DH-3000	AC380V/50Hz	24KW	500℃	3000kg	±10℃	700mm	340×95×230cm	堆板式 Stack type	1400kg	带贮藏箱 With Storage Container

DH-500F

欧洲型式 EUROPE TYPE

电焊条烘干箱(炉)
ELECTRODE DRYER OVEN

- ▲采用不锈钢电加热，最高温度500℃
- ▲内胆和可移动托盘(F3/F3V 3只、F6/F6V 6只、F9/F9V 9只)
- ▲温度数字显示，具有自动控制温度和定时烘干等功能。
- ▲F3V、F6V、F9V型配备通风系统，增强在炉腔的空气流通。容易散热、炉温均匀。
- ▲炉门重锁结构安全。
- ▲ stainless steel electric heating, the maximum temperature of 500 °C
- ▲ liner and removable tray (F3/F3V 3, F6/F6V 6, F9/F9V 9)
- ▲ digital temperature display, with automatic temperature control and timing drying function.
- ▲ F3V, F6V, F9V equipped with a ventilation system, enhancement in the furnace chamber air circulation. Easy to heat, the furnace temperature uniformity.
- ▲ door lock structure safety.



F3

MOD.F3 F3V

型号	MODEL	F3	F3V
容量	CAPACITY	203 KG/450MM Electrodes	
加热管	NO.OF HEATING ELEMENTS	3	
温度	TEMPERATURE	50℃-500℃	
功率	POWER	4.5KW	4.7KW
电压	VOLTAGE	380V/50/60Hz 3相	
内部尺寸	INTERNAL SIZES	560×740×560	
外型尺寸	EXTERNAL SIZES	880×880×1030	
自重	WEIGHT	140KG	
包装尺寸	PACKAGING DIMS	900×900×1050	
运输重量	GROSS WEIGHT	150KG	154KG



F6

F6V

MOD.F6 F6V

型号	MODEL	F6	F6V
容量	CAPACITY	404KG/450MM Electrodes	
加热管	NO.OF HEATING ELEMENTS	6	
温度	TEMPERATURE	50℃-500℃	
功率	POWER	9KW	9.4KW
电压	VOLTAGE	380V/50/60Hz 3相	
内部尺寸	INTERNAL SIZES	560×740×980	
外型尺寸	EXTERNAL SIZES	800×880×1480	
自重	WEIGHT	200KG	
包装尺寸	PACKAGING DIMS	900×900×1500	
运输重量	GROSS WEIGHT	215KG	219KG



F3V、F6V、F9V
带有风扇的通风系统<增强空气流通在烤箱室的热扩散均匀>
< ventilation system with fan to enhance air circulation in the baking Box room thermal diffusion uniform >



F9

MOD.F9/F9V

型号	MODEL	F9	F9V
容量	CAPACITY	606 KG/450MM electrodes	
加热管	NO.OF HEATING ELEMENTS	9	
温度	TEMPERATURE	500℃	
功率	POWER	13.5KW	13.8KW
电压	VOLTAGE	380V/50/60Hz 3相	
内部尺寸	INTERNAL SIZES	560×740×1430	
外型尺寸	EXTERNAL SIZES	800×880×1880	
自重	WEIGHT	266KG	
包装尺寸	PACKAGING DIMS	900×900×1900	
运输重量	GROSS WEIGHT	280KG	284KG



F10



F15

F8

型号	MODEL	F8	F15	F10
容量	CAPACITY	8KG	15KG	10KG
温度	TEMPERATURE	50℃-200℃		50℃-300℃
电压	VOLTAGE	AC 220V		
功率	POWER	238W	350W	500W
焊条长度	ELECTRODE LENGTH	450MM		
内部尺寸	INTERNAL SIZES	75×75×470	105×105×470	85×150×470
外型尺寸	EXTERNAL SIZES	145×185×630	180×220×610	260×226×570
自重	WEIGHT	6KG	9KG	10.3KG

电焊条烘干箱 ELECTRODE DRYER OVEN

可配温度记录仪

Can be equipped with temperature recorder

50°C-300°C



DHZ-100



DHZ-200



DHZ-300



DHZ-500

- ◆ 50°C-300°C采用电加热带分層加热 50°C-500°C采用远红外辐射板分層加热
- ◆ 50°C-300°C内胆镀锌板材料 50°C-500°C内胆不锈钢材料
- ◆ 自动控制温度
- ◆ 可放多种规格焊条
- ◆ 50°C-300°C heating by electric heating tube 50°C-500°C heating by far-infrared radiant panel
- ◆ 50°C-300°C inner-liner of zinc plated material 50°C-500°C inner-liner of stainless steel material
- ◆ Automatic temperature control
- ◆ Place welding rods of many specifications



型号	Model	DHE-50	DHE-100	DHZ-100	DHZ-200	DHZ-300	DHZ-500	DHZ-200B	DHZ-400B
焊条容量	Electrode Capacity	50KG	100KG	100KG	200KG	300KG	500KG	200KG	400KG
最长焊条长度	Electrode length	450mm							450MM
输入电压	Input Voltage	AC 220V OR 380V			AC 380V/415V	AC 380V/415V	AC 380V/415V	AC 380V/415V	
功率	Power	3KW	4.5KW	4.8KW	6KW	9KW	14.4KW	6KW	12KW
最高温度	Max.Temperature	50°C-500°C			50°C-300°C			50°C-500°C	
内腔尺寸(mm)	Inner size (L×W×H)	400×470×540	400×470×900	460×500×510	500×530×1030	430×530×1030×(2道)	540×585×595×(4道)	505×505×1035	505×1080×1035
外型尺寸(mm)	Overall Size(L×W×H)	570×730×810	570×730×1290	770×780×1060	885×780×1350	1385×780×1350	1600×780×1718	800×850×1350	800×1510×1350
自重	Net Weight	91.4KG	125.1KG	130KG	179.5KG	265KG	379.5KG	240KG	440KG
抽屜层数	Number of drawer	3	6	5	9	18	20	9	18
不锈钢电热管功率分布	Power distribution of stainless steel electric heating tube	上层 1 KW 中层 1 KW 下层 1 KW	上层 1.5KW 中层 1.5KW 下层 1.5KW	上层 0.8KW/2条 中层 0.8KW/2条 下层 0.8KW/2条	上层 1KW/2条 中层 1KW/2条 下层 1KW/2条	上层 1KW/2条 中层 1KW/2条 下层 1KW/2条	上层 0.4KW/6条 中层 0.6KW/6条 下层 0.8KW/6条 底部 0.4KW/6条	上层 1KW/2 中层 1KW/2 下层 1KW/2	上层 1KW/4 中层 1KW/4 下层 1KW/4
远红外辐射板功率分布	Power distribution of infrared ray from long distance								
包装尺寸(mm)	Overall Size(L×W×H)	700×880×1030	700×800×1420	920×850×1120	1000×850×1450	1450×840×1450	1700×900×1820	900×950×1450	900×1610×1450
毛重	Gross Weight	110KG	165KG	155KG	239KG	315KG	530KG	280KG	500KG

50°C-500°C



DHE-50



DHE-100



DHZ-200B



DHZ-400



50-500°C



AF 系列 AF Series
电焊条干燥恒温箱
ELECTRODE DRYER OVEN

- ◆ 内胆不锈钢材料 ◆ stainless steel material
- ◆ 不锈钢电加热管加热 ◆ Heating with stainless steel electric heating tube



型号	Model	AF-50	AF-50S	AF-100	AF100S	AF-150	AF-150S	AF-200	AF-300S
焊条容量	Electrode Capacity	50KG		100KG		150KG		200KG	300KG
最长焊条长度	Electrode length	450MM		450MM		450MM		450MM	450MM
输入电压	Input Voltage	240V/380V		240V/380V		240V/380V		240V/380V	240V/380V
功率	Power	2400W		2400W		3000W			4800W
工作温度	Work Temperature	50°C-350°C		50°C-350°C		50°C-350°C		50°C-350°C	50°C-350°C
内胆分格数	Number of chamber	3		3		4		5	10
内胆尺寸(mm)	Inner size	270×305×530		360×435×530		370×635×530		380×540×780	635×840×530
外型尺寸(mm)	Overall Size(L×W×H)	435×635×720		525×800×720		535×905×720		540×720×1145	1015×1030×720
重量	Weight	63KG		85KG		104KG		110KG	180KG
	温度表	Thermometer	数显表	Digital Display Table	温度表	Thermometer	数显表	Digital Display Table	数显表
									Digital Display Table

AM 系列 AM series
电焊条干燥恒温箱
ELECTRODE DRYER OVEN

- ◆ 内胆镀锌板或不锈钢材料 ◆ Inner chamber with zinc plated or stainless steel material
- ◆ 不锈钢电加热管加热 ◆ Heating with stainless steel electric heating tube



型号	Model	AM-2000	AM-3000	AM-3500	AM-4000	AM-4500	AMS-2000
焊条容量	Electrode Capacity	120LBS 55KG	220LBS 100KG	350LBS 160KG	450LBS 204KG	750LBS 340KG	120LBS 55KG
最长焊条长度	Electrode length	500mm					
输入电压	Input Voltage	AC 110V OR 220V					
功率	Power	1200W	1400W	2400W		2000W	1400W
工作温度	Work Temperature	50°C-250°C					
内胆分格数	Number of chamber	10	10	4	18	6	10
内胆尺寸(mm)	Inner size	270×270×550	360×360×550	500×480×550	500×480×550	650×630×550	260×260×550
外型尺寸(mm)	Overall Size(L×W×H)	460×438×732	550×530×732	745×656×732	745×656×732	895×803×732	540×720×510
重量	Weight	25kg	32kg	58.5kg	64kg	78.5kg	56KG

澳洲型式S系列 Australian Type S Series

电焊条 焊剂 烘干炉、保温筒(干燥器)

ELECTRODE.FLUX, DRYER OVEN, WELDING ROD DRYER(DRYER)



焊条烘干炉
ELECTRODE OVEN



S-150S<数显调节控制温度>
Digital display for temperature



S-150H



S-200



S-120E

焊剂烘干炉
FLUX OVEN

- ◆ 内胆不锈钢材料
- ◆ 不锈钢电加热管加热

- ◆ Inner chamber with zinc plated or stainless steel material
- ◆ Heating with stainless steel electric heating tube

型号	Model	S-150H	S-150S	S-200	S-120E
焊条、焊剂容量	Electrode, Flux Capacity	130KG		200KG	120KG
最长焊条长度	Electrode Length	450MM			
输入电压	Input Voltage	AC 220V/240V			
功率	Power	3000W		3600W	3000W
工作温度	Work Temperature	50°C-400°C			
内腔尺寸(mm)	Size of inner chamber	490×470×470		490×470×610	480×470×700
外型尺寸(mm)	Overall Size(L×W×H)	680×720×950		680×720×1085	600×600×1300
重量	Weight	79KG		89KG	90KG



S-12S



S-12F



手提式焊条保温筒
PORTABLE ROD OVEN



S-5V/T
(带温度表)
Thermometer



S-5F



S-5V



S-5F/B

S-5F/B, S-5F/C

型号	Model	S-12F	S-12S	S-5F	S-9F	S-5V	S-5V/T
焊条容量	Electrode Capacity	14KG		5KG	10KG	5KG	5KG
输入电压	Input Voltage	AC 220V/240V		AC 220V/240V OR 110V/120V			
功率	Power	700W		500W			
最高温度	Max.temperature	50-300°C		50-180°C		50-200°C	50-200°C
最长焊条长度	Length of longest welding rod	450MM		450MM			
内腔尺寸(MM)	Chamber Size	120×150×475MM		φ 85×470H	φ 110×470H	φ 85×470H	φ 85×470H
外型尺寸	Overall Size(L×W×H)	220×330×610MM		590×180×220MM	585×220×250MM	φ 250×470MM	φ 250×470MM
重量	Weight	10.2KG	11KG	6.6KG	7.35KG	5.45KG	5.45KG

1. 电压24V、36V、48V、60V-110V
 2. 温度: 75°C<->135°C两档(S-5F/C)
 3. 盖部磁性闭台
 4. 有卡片插位
 5. S-5F/B 50°C-200°C
- 1.Voltage 24V, 36V, 48V, 60V-110V (S-5F/C)
2.temperature: 75°C <-> 135°C Turret
3.Department of magnetic lid closure
4.A card slot is
5.S-5F/B 50°C-200°C

澳洲型式OZ系列 Australian Type OZ Series

电焊条干燥恒温箱、保温筒

ELECTRODE DRYER OVEN, WELDING ROD DRYER



ED-2.5A



ED-5A



OZ-10A



OZ-10B/T (温度计托盘)
(Thermometer tray)
OZ-10B (标准托盘)
(standard tray)



OZ-50



OZ-50A



OZ-50C

100W

型号	Model	ED-2.5A	ED-5A	OZ-10A	OZ-10B/T OZ-10B	OZ-50/OZ-50A	OZ-50C
焊条容量	Electrode Capacity	2.5KG		5KG			22KG
输入电压	Input Voltage	AC/DC 80V-110V	AC/DC 60-90V	AC/DC 220V OR 110V			
功率	Power	100W	135W	238W		800W	
最高温度	Max. Temperature	150°C	100°C	150°C	50°C-150°C	50°C-150°C/150°C	50°C-150°C
最长焊条长度	Longest electrode length	450MM					
内胆尺寸	Chamber Size	Φ55×480H	74 Dia×480H	76 Dia×483H		177 Dia×483H	
外型尺寸	Overall Size(L×W×H)	Φ100×500H	128 Dia×560H	178 Dia×584H		380×290×685H	320×380×685H
重量	Weight	4.3kg	3KG	7KG		14KG	16KG

用于焊机二次电源
(Use for the secondary power supply of welding machine)

数显温度控制
Digital display temperature control

OZ-10B/T (温度计托盘)
(Thermometer tray)
OZ-10B (标准托盘)
(standard tray)




OZ-350



OZ-125S (500°C)



OZ-125



可叠起使用
Compact
And
Stackable

- ◆ 内胆不锈钢材料
- ◆ 不锈钢电加热管加热

- ◆ Inner liner with stainless steel material
- ◆ Heating with stainless steel electric heating tube

型号	Model	OZ-125S	OZ-125	OZ-350	OZ-1000
焊条容量	Electrode Capacity	57 KG		159 KG	454 KG
最长焊条长度	Electrode length	450 MM			
输入电压	Input Voltage	AC 220V/240V			
功率	Power	2000W	1000W	2000W	4000W
工作温度	Work Temperature	50°C-500°C		50°C-300°C	
内胆分格数	Number of chamber	2		3	4
内胆尺寸(mm)	Inner Size	209×248×482		358×405×482	610×552×610
外型尺寸(mm)	Overall Size(L×W×H)	480×455×730	407×407×722	559×559×622	1016×768×768
重量	Weight	60KG	47 KG	75KG	150 KG



OZ-1000




澳洲型式 Australian Type

焊剂烘干箱
FLUX OVEN

- ▲由数字温控仪设定、控制显示温度
- ▲低额度的加热管布局能使温度均匀
- ▲长方型斜度的内腔，能方便装入、漏出焊剂
- ▲外部根据用户要求可装机械式温度表，以供求证检测

- ▲by digital temperature controller, temperature control display settings
- ▲Heating, low amount of pipe layout can make temperature even
- ▲rectangular cavity inclination, can easily installed, leakage flux
- ▲external according to user requirements can be installed mechanical thermometer, supply and demand to permit detection

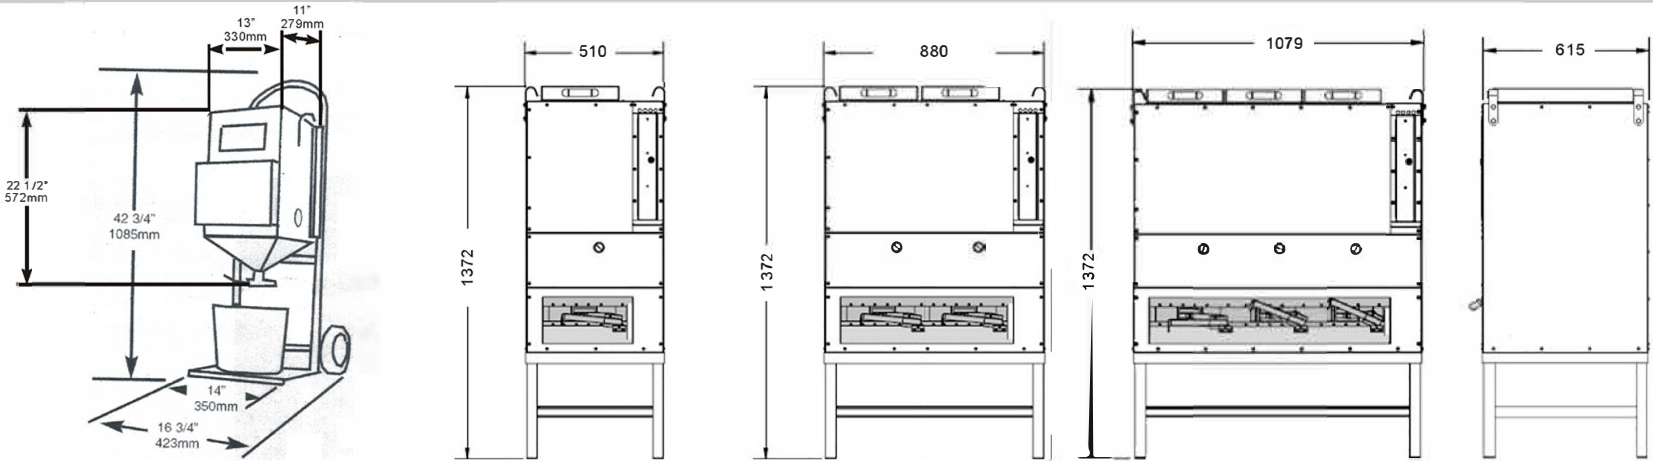

型号	Model	GOV-100	GOV-200	GOV-400	GOV-600
容量	Capacity	100LB<45KG>	200LB<90KG>	400LB<180KG>	600LB<270KG>
温度	Max. Temperature	50°C-300°C			
电压	Voltage	110V OR 220V AC		220V OR 380V AC	220V OR 380V AC
功率	Power	1000W	1500W	3000W	4500W
自重	Weight	23KG	70KG	91KG	113KG
				两个单独温度控制 Two separate temperature control	三个单独温度控制 Three separate temperature control



焊剂烘干箱 FLUX OVEN

- ◆ 自动控制、显示温度
 - ◆ 内胆不锈钢材料
 - ◆ 采用不锈钢加热管环形均匀分布
 - ◆ 装取焊剂方便、配有焊剂提桶
- ◆ Automatic control,temperature display
 - ◆ Internal Chamber is made of stainless steel material
 - ◆ Adopt stainless steel heating tube with ring even distribution
 - ◆ Convenient flux charge and discharge,match with flux drum



型号	Model	100L	200L	100L/A	200L/A	100L/B 100L/C	200L/B 200L/C	EF-125	EF-50	EF-10	EF-150
工作温度	Work Temperature	50°C-300°C	50°C-300°C	50C-300°C	50C-300°C	50C-300°C	50C-300°C	50°C-400°C	50°C-350°C	50°C-350°C	50°C-250°C
输入电压	Input Voltage	AC220V	AC220V	AC220V	AC220V	AC220V	AC220V	AC 220V/380V	AC200V	AC220V	AC 220V
电热功率	Power	3KW	3KW	3KW	3KW	3KW	3KW	3.6KW	2.1KW	1KW	3KW
加热管条数	Piece of heating tube	3	3	3	3	3	3	4	3	1	6 U型 12
焊剂容量	Capacity of flux	75kg	150kg	75kg	150kg	75kg	150kg	125KG	50kg	10kg	150kg
外型尺寸(mm)	Overall Size(L×W×H)	500×630×1108	600×730×1115	510×118×630	605×720×1350	700×118×550	800×650×1350	660×850×350	600×640×1220	400×300×900	750×660×720
重量	Weight	74kg	85kg	72KG	101KG	76KG	105KG	91KG	38KG	14KG	95KG

吸入式 YJJ-A-系列 YJJ-A- Series

自控焊剂烘干机

SUCTION SELF-CONTROLLED FLUX DRYING MACHINE



烘干机内上料机，能自动将焊剂从盛料斗中吸入到烘干机内胆中进行烘干，不需人工装料。装有微尘清除装置，在上料过程中能同时清除焊剂中的微尘，并收集到除尘中，保证了焊剂的焊接质量。

烘干内管状电加热管布局合理、温度均匀，内胆和电加热管均采用不锈钢制造，免除了铁锈对焊剂的污染。温度自动控制，可任意调节烘烤温度。温度达到预定的要求时，即自动切断电源，恒温时间由数量时间继电器控制。到了恒温设定时间，即自动切断电源。装有窥视孔，可随意观察烘干机内情况。

取料方便，只要按动出料手把，烘干后的焊剂即从下出口流出，关了手把即合闸。

The inner charging device of drying machine can automatically inhale the flux from stuff funnel to the inner gall of the machine and to have it dried, the process doesen.

The inner tubular electric heating pipe of the drying machine is reasonably arranged and well-proportioned in temperature, the inner gall and the electric heating pipe are both made up of stainless steel in order to prevent the flux from being contaminated by rust.

The temperature is automatically controlled, and the roasting temperature can be adjusted arbitrarily. When the temperature reaches the preconcerted requirement, it goes to automatic temperature controlling of which time is controlled by the digimatic timing relay. The power will be cut off automatically when the temperture controlling time ends. Sighting aperture is available to enable you to observe the drying machine at any time.

It is easy to discharge the stuff, by a simple press on discharging handgrip, the dried flux will flow out from the lower discharge outlet. Close the handgrip for closing.



型号	Model	YJJ-A-100	YJJ-A-200	YJJ-A-300	YJJ-A-500
焊剂	Flux Capacity	100KG	200KG	300KG	500KG
电热功率	Electrothermal Power	3KW	3KW	6KW	6KW
电源电压	Power Voltage	380V 三相四线 Triphase 4 Line			
最高工作温度	Max. Operating Temperature	500°C			
吸料速度	Material feeding Speed	180KG/小时H			
温度上升速度	Temperature Raising Speed	200°C/小时H			
控温时间	Adjustable Heating Time	1-999 分 min			
外型尺寸	External Dimension L×W×H(cm)	114×63×157	118×63×157	130×68×167	136×60×175
重量	Weight	205KG	235KG	265KG	320KG
烘干后焊剂含水量测定0.05% Moisture determination of dried flux is 0.05%					

旋转式 XZYH-系列 XZYH- Series

自控远焊剂烘干机

ROTARY SELF-CONTROLLED FAR-INFRARED FLUX DRYING MACHINE

本机由烘干料筒，保温贮藏箱及控制系统组成，采用远红外辐射加热、温度、时间自动控制、焊剂在低旋转中均匀受热，内腔采用不锈钢结构，最高温度450°C。

This machine, which is consisted of drying bucket, heat-insulated storage cabinet and control system, is heated by far-infrared radiation, with temprature and time self-controlled and flux being heated evenly during low-speed rotation. The inner cavity adopts stainless steel structure, and the maximum temperature reaches 450°C



型号	Model	XZYH-60	XZYH-100	XZYH-150	XZYH-200
输入电压	Input Voltage	AC380V/50Hz	AC380V/50Hz	AC380V/50Hz	AC380V/50Hz
功率	Power	3.6KW	4.8KW	9KW	9KW
最高温度	Max. Temperature	450°C	450°C	450°C	450°C
保温调节范围	Adjustable Heating Time	1-999 分min	1-999 分min	1-999 分min	1-999 分min
可烘焊剂容量	Drying Flux Capacity	60kg	100kg	150kg	200kg
可贮焊剂容量	Storable Flux Capacity	60kg	100kg	150kg	200kg
料筒转速	Bucket Rotary Speed	5r.p.m	4.5 r.p.m	4r.p.m	4r.p.m
外型尺寸(mm)	Overall Size(L×W×H)	145 X 51 X 125cm	160 X 61 X 140cm	170 X 66 X 146cm	175 X 66 X 154cm
重量	weight	225g	260kg	316kg	350kg

美制式 **Us Standard**

焊剂烘干箱 FLUX OVEN

- ◆ 自动控制、显示温度
- ◆ 内胆不锈钢材料
- ◆ 采用不锈钢加热管环形均匀布局
- ◆ 装取焊剂方便、配有焊剂提桶
- ◆ 带活塞升降保证开关炉盖安全性
- ◆ N240型有单独的三内缸可分开操作
- ◆ KF-900型有单独的三内缸可分开操作

- ◆ Automatic control, temperature display
- ◆ Internal bladder is made of stainless steel material
- ◆ Adopt stainless steel heating tube with ring even distribution
- ◆ Convenient flux charge and discharge, match with flux drum
- ◆ protect to switch the cap of oven safe to up and down with piston
- ◆ N240 type has two inner casing for operating each other
- ◆ KF-900 type has three inner casing for operating each other



各型号焊剂烘箱
带有焊剂提桶
The model flux oven
Pail with a flux



KH-125



KH-300




KH-600



KHTH-600



KF-900

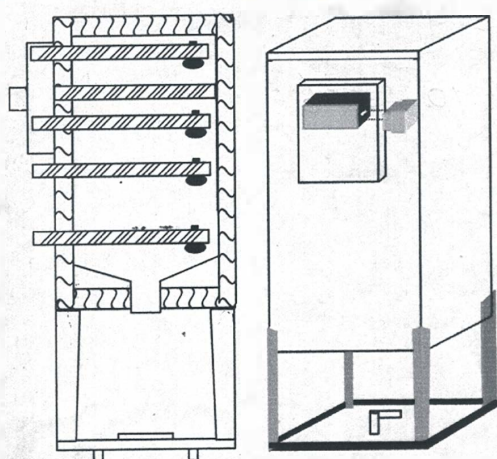

N-120



N-240A



型号	Model	N 120A	N240A	KH-125	KH-300	KH-600	KHTH-600	KH-900
焊剂容量	Capacity of flux	120KG	240KG	125LBS 56.7KG	300LBS 136KG	600LBS 272KG		885 LBS 402KG
工作温度	Work Temperature	50℃-500℃		60℃-160℃ OR 60℃-300℃	50℃-300℃		50℃-500℃	
输入电压	Input Voltage	230V OR 380V AC		120V OR 240V	120V OR 240V OR 420V		240V OR 420V	
功率	Power	3000W	6000W	800W OR 1600W	2400W	4200W	4800W	2400W×3
保温层	Thickness of Mineral Wool	100MM						
内腔尺寸(mm)	Inner Size	430×535×550	430×535×550×2	308×406×560	510×510×560	508×508×1011		(510×510×560)×3
外型尺寸(mm)	Overall Size(L×W×H)	680×920×1190	920×1350×1190	565×500×1010	920×1020×1450	828×650×1540	928×750×1540	2470×1020×1450
重量	Weight	94KG	175KG	71KG	108KG	167KG	197KG	290KG

焊丝干燥存储柜
WIRE STABILIZATION OVENS



- ▲数字显示控制温度
- ▲可调式货架容纳不同直径包装的焊丝
- ▲焊丝线轴应放在每架杆两个中心、烤箱中间
- ▲本烘箱设计温度50℃-300℃，使用温度必须按照焊丝线轴材料而定（例：塑料线轴存储温度不能超过120℃）
- ▲Digital display for temperature
- ▲Adjustable tray for different spool size
- ▲Spools should be kept in the middle of the poles.
- ▲The oven can be adjusted 50℃-300℃
- The working temperature has to be set according to the spool material.
- (For example,it can not be more than 120℃ for plastic spool)

K-24RS

容量	CAPACITY	12"(Φ300)焊丝24个或16"(Φ300)焊丝16个 24 spools of wire (12 in diameter) or 16 spools wire (16 in diameter)
电压	VOLTAGE	AC 220V
功率	POWER	1800W
温度	TEMPERATURE	50℃-300℃
内部尺寸	SIZE OF INNER CAVITY	89×53×119CM
外型尺寸	OVERALL SIZE	107×74×156CM
自重	WEIGHT	205KG



K-12RS

型号	MODEL	K-12RS
容量	CAPACITY	16" (Φ400)焊丝12个或12" (Φ300)焊丝18个 门架可储存TIG直杆焊丝 12/60 Lb.(16" diameter)Wire coils (6 reels per shelf) and up to 8/10lb. The door frame can be stored TIG straight wire
电压	VOLTAGE	110V/220V
功率	POWER	1000W
温度	TEMPERATURE	50℃-120℃
内部尺寸	SIZE OF INNER CAVITY	700×522×960MM
自重	WEIGHT	205KG



SRH-100




型号	Model	SRH-100
温度	Max.Temperature	50℃-200℃
电压	Voltage	220V/50Hz
功率	Power	2.4KW
内部尺寸	Size of inner cavity	110×40×32CM
外型尺寸	Overall Size	122×51×74CM



K-6RS



K-4RS

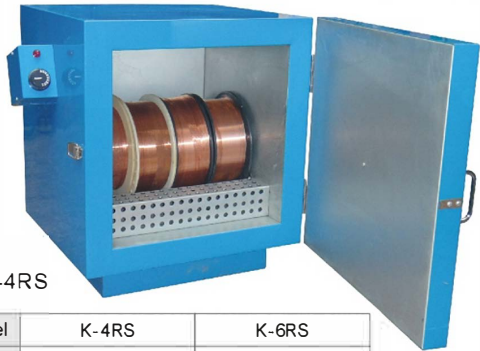

型号	Model	K-4RS	K-6RS
容量	Capacity	4 each 12"spools	6 each 12"spools
温度	Max.Temperature	50℃-120℃	50℃-110℃
电压	Voltage	110V/220V	
功率	Power	500W	700W
内部尺寸	Size of inner cavity	457×457×457MM	450×430×830MM
外型尺寸	Overall Size	660×710×660MM	700×580×1030MM
自重	Weight	36KG	82KG

美国型式 K 型系列 US Type K Series

电焊条烘干箱 ELECTRODE DRYER OVEN



K 系列温度 50℃-300℃
K Series Temperature 50℃ -500℃

- ◆ 不锈钢加热管加热。
- ◆ 内室镀锌板材料，需要不锈钢材料请在订单中注明。
- ◆ The heating tube with stainless steel get hot
- ◆ Internal bladder of galvanization material, Please remark in the order if the stainless steel material you need



外观设计专利(中国)



K-900B

K-900A



K-450

K-300B

K-450/S
<数显设定温度>
<Digital Set Temperature>



K-450T
(带温度表)
(Thermometer)

K-300B



(数显表在后部)
(Figures show that table in the back)

K-300A

型号	Model	K-900A	K-900B	K-450	K-300A	K-300B
焊条容量	Electrode Capacity	1100Lbs(500KG)	450Lbs(204KG)	350Lbs(159KG)		
最长焊条长度	Electrode length	600MM	500MM	450MM		
输入电压	Input Voltage	AC 110V OR 220V	AC 110V OR 220V	AC 110V Only or 220V		
功率	Power	3.2KW	1.6KW	1.6KW		
工作温度	Work Temperature	50℃-300℃	50℃-300℃	50℃-300℃		
内腔分格数	Number of chamber	10	8	8	6	8
内腔尺寸	Size of inner cavity	Φ78.7CM×64.7CM	Φ49.5CM×50.8CM	Φ45CM×57CM×53CM		
外型尺寸	Overall Size(L×W×H)	90CM×90.5CM×90CM	60CM×64CM×63.8CM	75CM×57CM×58CM		
重量	Weight	131KG	137KG	63KG	57KG	55KG

实用新型专利号: 02251982.3
Patent Number of Practical New Type: 02251982.3



DYH-100A

DYH-60A

DYH-30A



DYH-100B

DYH-60B

DYH-30B

DYH-系列 温度50℃-500℃ DYH- series of temperature 50℃ -500℃

本焊条烘干箱采用环形循环热结构，烟囱效应促使热源沿着中央支柱上升，与炉膛中的环形及支架一同促成热的内循环，使焊条加热，采用自动控温、定时控制技术、具有热效率高、容量大、温度均匀操作简单及节约能源等特点，广泛应用于焊条的焊前烘干处理。本产品全采用模具制造。

◆炉膛为分层结构，不锈钢材料耐腐蚀。

◆采用不锈钢加热管加热，耐用。

◆电气控制：由XMT型数字显示温度调节仪。HD (C型、B型无时间继电器) 数显时间继电器，CJ 1 0型交流接触器等几部分组成，具有控制精度高，寿命长，无噪声，调正使用维修方便等功能。感温元件：采用镍铬镍硅热电偶作为温度的检测。



DYH-100C(240V/420V)

This electrode drying oven adopts circular heat cycle structure. It is for the chimney effect that leads heat source rise along the central pillar, so that the inner heat cycle is formed together with the ring and stand in the furnace tank, thus to heat the electrodes. Automatic temperature control and timing control technology has been adopted. It has the advantages of high heating efficiency, large capacity, even temperature, easy to operate and energy-saving and has been widely used of drying treatment of electrodes prior to welding. The manufacture of this product fully adopts mould.

◆The furnace tank adopts layer structure with corrosion resisting stainless steel material.

◆Durable stainless steel heating pipe is adopted to heat.

◆Electrical control: consisted of XMT type digital display temperature regulator. HD (C type, B type relay without timer) digimatic time relay and CJ1 0 type AC contactor etc. , It takes the functions of high control precision, durable, without yawp, easy to adjust, operate and maintain etc. Temperature sensing element: thermocouple nickel chromiUm—nickel SilicoN is adopted to inspect the temperature.

DYH-30	DYH-60	DYH-100
30KG	60KG	100KG
		450mm
		AC220V
1.6KW	1.6KW	3.2KW
		50℃-500℃
2	4	6
Φ245×550	Φ350×550	Φ460×550
80×40×50cm	80×57×66.7cm	80×67×77.8cm
40KG	70KG	75KG



K-300T



K-300



K-300D

美制式 K 型系列 US Type K Series

电焊条保温筒

ELECTRODE WELDING ROD DRYER(DRYER)



K-5/1

K-5

5-5/2



K-5/5



K-5D




K-5D/T



K-5DSS/350

K-5

型号	Model	K-5/1	K-5/2	K-5/5	K-5D	K-5D/T	K-5DSS/350
焊条容量	Electrode Capacity	2.5KG		5KG	2.2KG/450MM		
输入电压	Input Voltage	AC.DC 60V-110V		AC.DC 60V-110V	120V		120V
功率	Power	100W		190W	238W		
最高温度	Max.Temperature	150°C		150°C	135°C		135°C
最长焊条长度	Electrode Length	450MM		450MM	450MM		350MM
内腔尺寸(mm)	Chamber Size	Φ55×480H		Φ74×480H	Φ50×470H		Φ50×370H
外型尺寸(mm)	Overall Size(L×W×H)	Φ100×500H		Φ128×530H	120×135×550MM		120×135×450MM
重量	Weight	2KG		2.9KG	3.2KG		2.8KG
备注		夹子 Clip	插头 Plug			带表 Thermometer	不锈钢 Stainless Steel

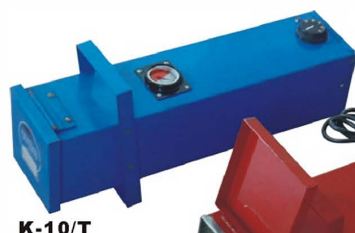

K-10/T



K-10B



K-10/350



K-10



K-10SS



K-10SS/T

K-10

型号	Model	K-10B	K-10	K-10/T	K-10/350	K-10SS	K-10SS/T
焊条容量	Electrode Capacity	450MM=6.8KG(350MM=4.5KG)					
输入电压	Input Voltage	AC 230V OR 120V				AC 230V OR 120V	
功率	Power	260W OR 130W				260W OR 130W	
最高温度	Max.Temperature	150°C	50°C-150°C OR 200°C			50°C-150°C OR 200°C	
最长焊条长度	Electrode Length	350MM 400MM 450MM			350MM	350MM 400MM 450MM	
内腔尺寸(mm)	Chamber Size	74×74×370.420.470MM			74×74×370MM	74×74×370.420.470MM	
外型尺寸(mm)	Overall Size(L×W×H)	134×250×464.514.564MM			134×250×464MM	134×250×464.514.564MM	
重量	Weight	5.8KG	5.7KG	5.95KG	4KG	5.7KG	5.8KG
备注				带表 Thermometer		带表 Thermometer	



K-15



K-15W/B



K-15W/L



K-15W/T



K-15D



K-15HT



K-15

型号	Model	K-15	K-15W/T	K-15W/L	K-15W/B	K-15HT	K-15D
焊条容量	Electrode Capacity	15 Lbs 6.8KG				5KG	5KG
输入电压	Input Voltage	AC 230V OR 120V				AC 230V	AC 230V
功率	Power	238W				500W	215W
最高温度	Max.Temperature	150°C		50°C-150°C		50°C-300°C	150°C
最长焊条长度	Electrode Length	450MM				450MM	450MM
内腔尺寸(mm)	Chamber Size	Φ86×473H				Φ86×482H	Φ75×460H
外型尺寸(mm)	Overall Size(L×W×H)	160×175×576		160×175×616		340×210×530	160×165×520
重量	Weight	4.6KG	4.65KG	4.71KG	4.73KG	7.1KG	3.35KG
备注			带温度表 Thermometer		带温度表 Thermometer		

美制式 K 型系列 US Type K Series

电焊条烘干炉、保温筒(干燥器)

ELECTRODE INSULATING OVEN, WELDING ROD DRYER BARREL



K-50

K-50

K-50W/B

5-50W/BT

K-50W/D

K-50B

K-50S

K-50SS

型号	Model	K-50	K-50B	K-50W/B	K-50W/T	K-50S	K-50W/B	K-50SS
焊条容量	Electrode Capacity	50 Lbs 22KG						20 Lbs 22KG
输入电压	Input Voltage	AC 230V OR 120V						AC 230V OR 120V
功率	Power	238W						
最高温度	Max. Temperature	50°C-150°C						50°C-150°C
最长焊条长度	Electrode Length	450MM						450MM
内腔尺寸(mm)	Chamber Size	153×153×466						153×153×466
外型尺寸(mm)	Overall Size(L×W×H)	214×248×526	215×265×605	290×335×675	234×290×576	215×265×605	214×248×526	
重量	Weight	9.3KG	10KG	13KG	10.5KG	10KG		
备注		带温度表 Thermometer						数显温控表 Digital temperature display



K-22



K-200T



K-200



KHT-50



K-22
K-55
K-200



KHT-900B

型号	Model	K-200/K200T	KHT-50	K-55	K-22
焊条容量	Electrode Capacity	90.7KG	25KG	24KG	10KG
输入电压	Input Voltage	120V OR 240V AC/DC	AC 230V	120V OR 240V AC/DC	
功率	Power	500W/1000W	2000W	400W/800W	300W/600W
最高温度	Max. Temperature	50°C-150°C	50°C-500°C	50°C-200°C	50°C-200°C
最长焊条长度	Length of longest welding rod	450mm			
内腔尺寸	Chamber Size	466×318×318mm	200×200×490MM	470×180×120mm	470×112×86mm
外型尺寸	Overall Size(L×W×H)	605×434×413mm	590×700×535MM	574×235×285mm	570×190×260mm
重量	Weight	32KG	67KG	15.2kg	10.3kg
备注	Note	K-200T 带温度表 Thermometer			



K-55



K-500
K-900



KHT-900A



KHT-500




型号	Model	KHT-500	KHT-900A	KHT-900B
容量	Capacity	215KG(450MM)	454KG(450MM)	
电压	Voltage	240V/480V	240V/480V	
功率	Power	3000W	6000W	
温度	Temperature	50℃-500℃	50℃-500℃	
温度数字控制器		Digital temperature controller		
内部尺寸	InnerSize	458×483×458MM	457×470×920MM	
外型尺寸	Overall Size	990×1028×915MM	894×876×1473MM	
自重	Weight	105 kg	168KG	172KG

美制式 PF系列 US Type PE Series


电焊条保温筒

ELECTRODE WELDING ROD DRYER

- ◆ 控温(Control temperature) 150°C <PF-1>
- ◆ 调温(Attemperation) 50°C-150°C <PF-1W、PF-2、PF-5、PF-5A、PF-15、PF-15B>
- ◆ 最长焊条(Welding rod length) 500mm<可定制使用450、400、350长度焊条>

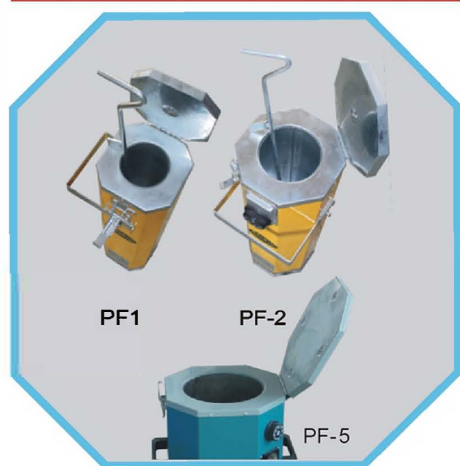

产品外型上视图
Product appearance view

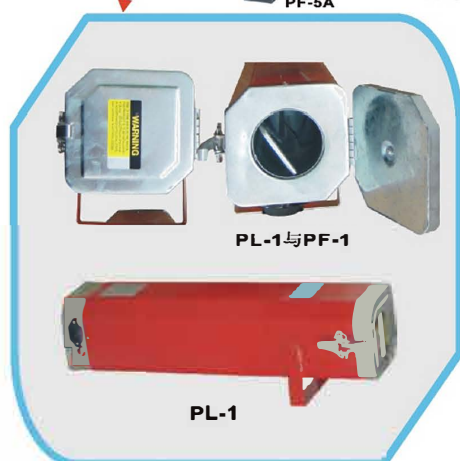

型号	Model	PF-1	PF-1W	PF-1W/T	PF-2	PF-2T	PF-15B	PF-15B/S	PF-5T	PF-5	PF-5A	PF-5A/T	PF-15A/T
焊条容量	Electrode Capacity	5KG			10KG		70KG		25KG		25KG		70KG
输入电压	Input Voltage	AC 120V OR 240V											
功率	Power	205W			238W		1000W		500W				1000W
最高温度	Max. Temperature	150°C	50°C-150°C			50°C-150°C		50°C-150°C		50°C-150°C		50°C-150°C	
最长焊条长度	Electrode length	500mm			500mm		500mm		500mm		500mm		500mm
内腔尺寸	Chamber Size	φ 73 × 505			φ 98 × 505		φ 350 × 515		φ 195 × 510		φ 195 × 510		φ 350 × 515
外型尺寸	Overall Size(L × W × H)	150 × 155 × 585mm			190 × 190 × 595mm		580 × 495 × 600mm		370 × 295 × 585mm		395 × 355 × 700mm		525 × 555 × 750mm
重量	Weight	4.2KG	4.3KG	4.45KG	5.3KG		40KG		13.1KG		19.75KG		47KG
包装尺寸	Package Size	490 × 335 × 615MM 6只装			425 × 425 × 630MM 4只装		690 × 550 × 660MM 单只装		615 × 395 × 615MM 2只装		810 × 450 × 800MM 2只装		600 × 580 × 800MM 单只装



型号	Model	PF-5B	PF-5W	PF-5W/T	
焊条容量	Electrode Capacity	5KG			
输入电压	Input Voltage	AC 230V AC.DC 24V、36V、60V-110V			
功率	Power	205W			
焊条长度	Electrode Length	450MM			
最高温度	Max.Temperature	150°C	50°C-150°C		
内腔尺寸(mm)	Chamber Size	Φ72×470H			
外型尺寸(mm)	Overall Size(L×W×H)	148×270×570			
重量	Weight	3.1KG	3.3KG	3.5KG	



美制式 PE系列 US Type PE Series


电焊条保温筒

ELECTRODE WELDING ROD DRYER


- ◆ 控温(Control temperature) 150℃<PE-1>
- ◆ 调温(Attemperation) 50℃-150℃< PE-1W、PE-2、PE-5、E-5A、PE-15、PE-15B>
- ◆ 最长焊条(Welding rod length) 500mm<可定制使用450、400、350长度焊条>

PE-1

PE-2

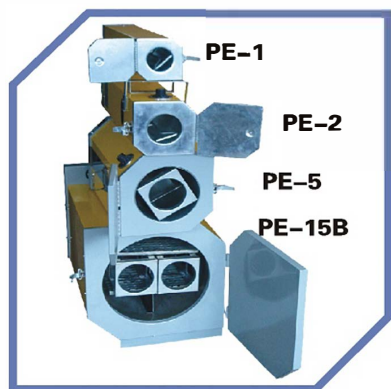


产品外型上视图
Product appearance view



本产品专利证书(中国)



产品说明书
Manual

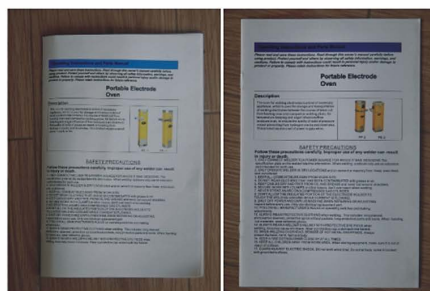

代您印制内包装彩盒
Color box available as your own design



PE-1



PE-1W



PE-1W/T

带温度表
Thermometer



PE-1W/S



智能数显温控表、温控±1℃
Intelligent digital display temperature control meter, temperature 1℃±



实际温度
Actual Temperature

设定温度
Set Temperature

确认
ENTER Key

索引键
INDEX Down

向下
Arrow Down

向上
Arrow Up



PE-2



PE-2T



PE-2W/S



PE-5




PE-5T

带温度表
Thermometer

带温度表
Thermometer

带温度表
Thermometer

带温度表
Thermometer

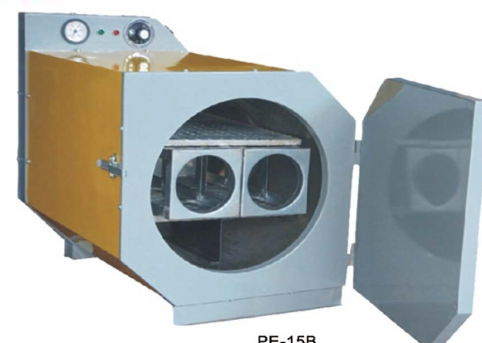

PE-15B



PE-5A



PE-5A/T



PE-5A/S



PE-15A/T



PE-15B/S

带温度表
Thermometer

数显表
Digital Display Table

带温度表
Thermometer

数显表
Digital Display Table

型号	Model	PE-1	PE-1W	PE-1W/S	PE-1W/T	PE-2	PE-2T	PE-2W/S	PE-5A	PE-5	PE-5T	PE-5A/T	PE-5A/S	PE-15B	PE-15A/T	PE-15B/S
焊条容量	Electrode Capacity	5KG				10KG			25KG				70KG			
输入电压	Input Voltage	AC240V AC/DC 60V-110V				AC240V AC/DC 60V-110V			AC240V AC/DC 60V-110V				AC240V AC/DC 60V-110V			
功率	Power	205W				238W			500W				1000W			
最高温度	Max.Temperature	150℃	50℃-150℃					50℃-150℃	50℃-150℃				50℃-150℃			
最长焊条长度	Electrode length	500mm				500mm			500mm				500mm			
内胆尺寸	Chamber Size	φ73×502mm				φ98×502mm			φ197×502				φ352×502mm			
外型尺寸	Overall Size(L×W×H)	186×148×578mm				202×235×578mm			380×390×689	318×295×578	380×390×689		475×588×580	565×550×689	475×588×580	
重量	Weight	3.8KG	3.9KG	4.0KG	4.15KG	5.3KG	5.4KG	5.4KG	18.5KG	13.2KG	18.5KG		38.4KG	47.6KG	38.4KG	

美制式 PE, TRC系列 US Type PE, TRC series

电焊条保温筒

ELECTRODE WELDING ROD DRYER



外观设计专利



TRC-5K

TRC-10K



TRC-5W

TRC-10W



TRC-5T

TRC-10T



TRC-5W/B

TRC-5W/T

TRC-10W/B

TRC-10W/T



TRC-5TC

TRC-10TC

温度控制 ±1℃ 配智能温控数显表
Temperature control is ±1℃ with intelligent digital temperature control table



TRC-10S

型号	Model	TRC-5W/B	TRC-5W/T	TRC-10W/B	TRC-10W/T	TRC-5TC	TRC-10TC	TRC-10S
焊条容量	Electrode Capacity	5KG	10KG	10KG	10KG	5KG	10KG	10KG
输入电压	Input Voltage	AC 220V OR AC/DC 110V					AC 220V	
功率	Power	205W	238W	238W	238W	300W	360W	238W
最高温度	Max. Temperature	50℃-150℃					50℃-300℃	50℃-150℃
最长焊条长度	Electrode Length	450MM						
内胆尺寸	Chamber Size	Φ86×465H		Φ108×465H		Φ86×465H	Φ108×465H	Φ108×465H
外型尺寸	Overall Size(L×W×H)	145×200×590		210×167×590		165×195×670	190×225×670	210×167×590
重量	Weight	3.9KG	3.8KG	4.3KG	4.2KG	4.1KG	5.0KG	4.5KG



PE-2C

PE-1C



PE-1K


PE-2K



PE-1B

PE-2W

PE-2W/T

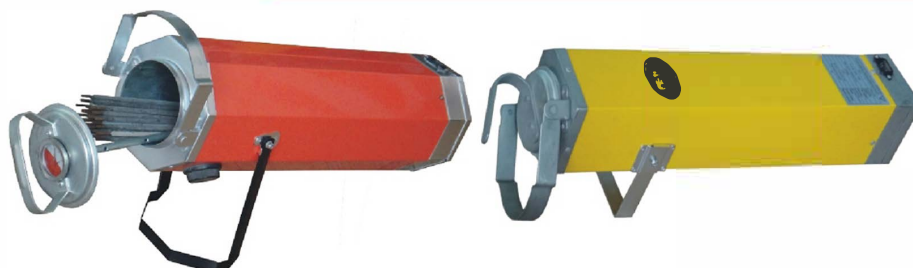


型号	Model	TRC-5K	TRC-10K	TRC-5W	TRC-10W	TRC-5T	TRC-10T	PE-2C	PE-1C	PE-1K	PE-2K	PE-1B	PE-2W	PE-2W/T	
焊条容量	Electrode Capacity	5KG	10KG	5KG	10KG	5KG	10KG	10KG	5KG	5KG	10KG	5KG	10KG		
输入电压	Input Voltage	AC220V AC.DC60-120V				AC 220V/AC.DC 120V		AC 230V AC.DC 60-110V		AC 220V/110V		AC 230V AC.DC 60-110V			
功率	Power	205W	238W	205W	238W	205W	238W	238W	205W	205W	238W	205W	238W	238W	
最高温度	Max.Temperature	150℃		50℃-150℃				150℃		150℃		50℃-150℃			
最长焊条长度	Electrode Length	450MM												500MM	
内胆尺寸	Chamber Size	Φ86×485H	Φ108×485H	Φ86×485H	Φ108×697H	Φ86×465H	Φ108×465H	Φ108×465H	Φ86×465H	Φ73×502H	Φ98×502H	Φ86×465H	Φ110×520H		
外型尺寸	Overall Size(L×W×H)	Φ162×697H	Φ185×697H	162×200×635	185×228×642	145×200×590	210×167×590	170×170×650	130×130×640	145×145×598	205×230×615	180×150×565	235×180×630		
重量	Weight	3.8KG	4.2KG	3.6KG	4.2KG	3.8KG	4.2KG	4.8KG	3.8KG	4.1KG	5.7KG	3.8KG	4.9KG	4.8KG	

美制式 TRC系列 US Type TRC Series

电焊条保温筒

ELECTRODE WELDING ROD DRYER

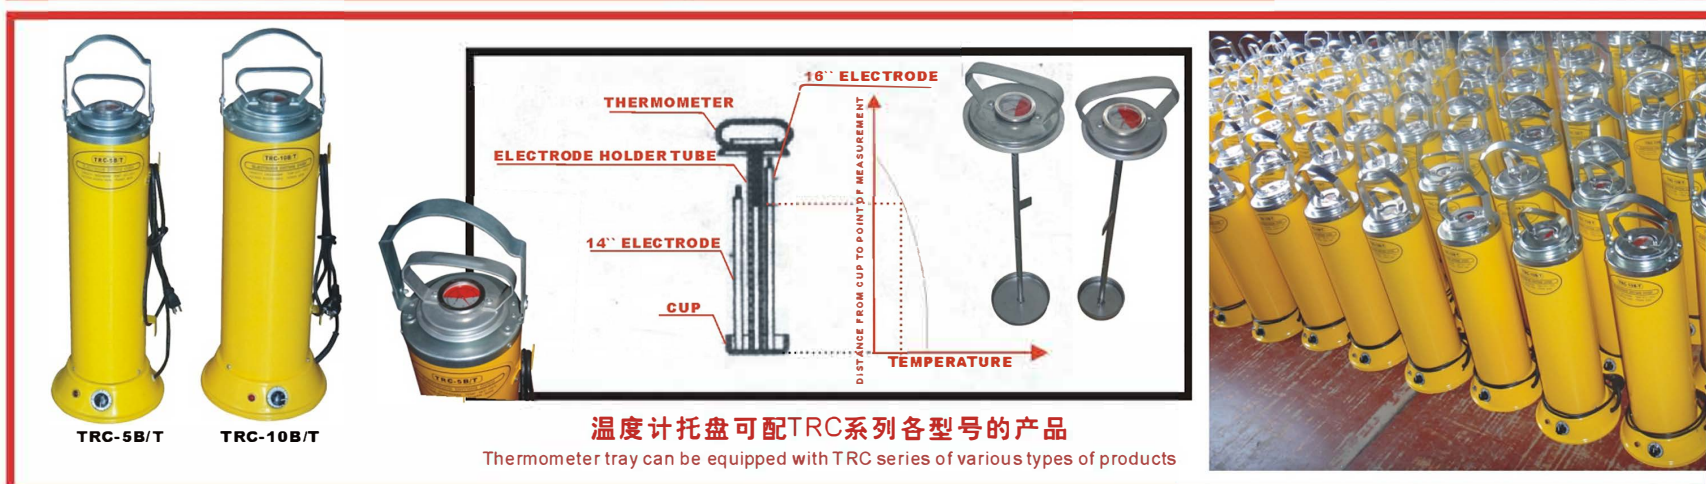

型号	Model	TRC-5F	TRC-5	TRC-5KC	TRC-5W/C	TRC-5B/T	TRC-10B/T	TRW-5	TRC-22
焊条容量	Electrode Capacity	5KG					10KG	5KG	50LBS(22.8KG)
输入电压	Input Voltage	AC.DC60V-120V	AC 230 AC.DC 60V-110V			AC 220V AC.DC 60-120V		AC 230V	AC 230V OR AC 120V
功率	Power	100W-195W	205W				238W	450W	
最高温度	Max. Temperature	150°C			50°C-150°C	50-150°C		50°C-300°C	150°C
最长焊条长度	Electrode Length	450MM							
内腔尺寸	Chamber Size	Φ86×485H						Φ86×490H	Φ190MM×480H
外型尺寸	Overall Size(L×W×H)	162×195×660		Φ192×692H		Φ220×720H	Φ240×720H	Φ192×710H	Φ358×600MM
重量	Weight	3.8KG	3.75KG	3.85KG	3.92KG	4.25KG	5.25KG	4.5kg	11KG

特殊要求制作

The Special Requirements Of The Production

订单必须注明
Orders must be specified



内外包装可以按客户要求印刷LOGO
Internal and external packaging can be
printed with private LOGO according to
customer's requirements



本厂无偿为国外公司、企业书印或铜铝名牌或
在产品上刻模冲压印字。
Stamping logo or label on the products are free



欧美型式 Europe Type

电焊条保温筒

ELECTRODE WELDING ROD DRYER



TG-5




TY-5

TY-10



TRC-5D

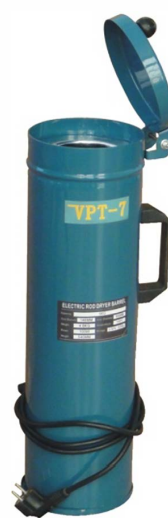

VPT-7



OV50



OV15



② TC-5
50°C-200°C

OV15.OV50

- ◆外部冷轧板喷塑，内胆镀锌板材料。
- ◆不锈钢制造请注明。

OV15.OV50

- ◆ External tank material is coat plated cold rolled plate. Inner material is galvanized sheet
- ◆ Stainless steel is optional material



型号	Model	OV15	OV15X	OV50	OV50X
焊条容量	Electrode Capacity	6.8KG		22.7 KG	
输入电压	Input Voltage	115V	230V	115V	230V
功率	Power	350W		450W	
焊条长度	Electrode Length	450MM		450MM	
最高温度	Max.Temperature	50℃-150℃			
内腔尺寸(mm)	Chamber Size	19×5 1/2×3 in		19×6 1/2×6 1/2 in	
外型尺寸(mm)	Overall Size(L×W×H)	23×7 3/4×7 in		23×8 7/8×11 1/8 in	
重量	Weight	9KG		11.5KG	



温控器调节温度
Adjust the temperature by thermostat



数显温度控制
Digital temperature display

型号	Model	TG-5	TC-5	VPT-7	TY-5	TY-10	TRC-5D	TRC-10D
焊条容量	Electrode Capacity	5KG	5KG	5KG	5KG	10KG	5KG	10KG
输入电压	Input Voltage	AC 230V OR 120V	AC 230V AC.DC 60-110V	AC 230V	AC220V AC.DC 60-120V			
功率	Power	238W/195W		150W	238W/195W			
焊条长度	Electrode Length	450MM						
最高温度	Max.Temperature	150℃	50℃-200℃	100℃	150℃			
内腔尺寸(mm)	Chamber Size	Φ88×493H	Φ88×450H	Φ88×475H	Φ88×510H	Φ110×490H	Φ88×510H	Φ110×490H
外型尺寸(mm)	Overall Size(L×W×H)	140×203×615	Φ140×500H	Φ145×540H	150×205×640	185×225×640	150×180×730	170×200×700
重量	Weight	4.3KG	4.1KG	3.8KG	4KG	4.2KG	4KG	4.2KG
			带温度表 Thermometer					

带温度表
Thermometer

欧美制式 Europe Type

电焊条保温筒

ELECTRODE WELDING ROD DRYER(DRYER)

- ◆温度150℃
- ◆温度50℃-200℃无段调节
- ◆焊条提升与盖一体式

- ◆Temperature of 150℃
- ◆50℃-200℃ Stepless free adjusting
- ◆Welding Rod lift and Cover all-in-one



型号	Model	P8	P8C	P8T	P8S	PW8	PW15	P15	P15C	P15T	P15S	DS 23/50-FT	F45/120-AT		
焊条容量 <KG>	Electrode Capacity	8KG					15KG					23 KG	54 KG		
输入电压 <V>	Input Voltage	120V OR 230V AC 50/60Hz				AC/DC 60V-120V		120V OR 230V、AC 50/60HZ					AC 230V、120V	AC 230V	
功率 <W>	Power	195W/238W					300W					400W	2000W		
焊条长度 <MM>	Electrode Length	450MM			450MM			450MM							
最高温度 <℃>	Max.Temperature	150℃	50℃-200℃					150℃	50℃-200℃				50℃-200℃		
内腔尺寸(mm)	Chamber Size	76×76×470					105×105×470					156×156×470	280×290×470		
外型尺寸(mm)	Overall Size(L×W×H)	145×185×640	145×210×597			145×185×610	176×212×610	176×212×640	176×240×608			218×287×572	423×385×590		
重量 <KG>	Weight	5KG	5.2KG	5.4KG	5.9KG	5.6KG	7.3KG	6.9KG	7.15KG	7.5KG	7.6KG	11.5KG	35KG		
					数显温控 Digital temperature control		针式、磁性加热夹 Needle And Magnetic Insulating Heating Jack							数显温控 Digital temperature control	



参数与P8C、P15C相同

Parameters are same as P8C, P15C the same



丹麦型式 Danish Type



EQ-93

150℃



EQ-93Si/T

带温度表
Thermometer



EQ-97Si/T

50℃-150℃



EQ-97Si/W



EQ-93Si/W

50℃-150℃



EQ-97Si

EQ-93Si

150℃

型号	Model	EQ-93	EQ-93Si	EQ-93Si/T	EQ-97	EQ-97W	EQ-97W/T	S1	S2	S3
焊条容量 <KG>	Electrode Capacity	9KG	5KG		9KG			10KG		
输入电压 <V>	Input Voltage	AC 230V OR 110V			36V/70V/110V/230V			AC 230V AC/DC 110V/36V/24V		
功率 <W>	Power	300W	205W		238W			238W		
焊条长度<MM>	Electrode Length	450MM						500MM		
最高温度 <℃>	Max.Temperature	100℃	150℃	50℃-150℃	150℃	50℃-150℃		200℃	50℃-200℃	
内腔尺寸(mm)	Chamber Size	88×120×460	Φ76×460H		110×110×480			100×100×510		
外型尺寸(mm)	Overall Size(L×W×H)	132×220×550	145×165×570		200×215×600	200×215×600	200×215×623	205×195×610		
重量 <KG>	Weight	3.8KG	3.5KG	3.6KG	7.0KG	7.15KG	7.2KG	7KG	7.1KG	7.12KG

电焊条保温筒

ELECTRODE WELDING ROD DRYER(DRYER)

◆SS-2 全部不锈钢制造

◆SS-4 全部镜面304不锈钢制造

◆GS-4 全部A3材料黑色喷塑

◆SS-2 all stainless steel

◆SS-4 all mirror finished 304 stainless steel

◆GS-4 all A3 material with black spraying plastic



PD-4-50、PD-4-20T
内胆全不锈钢制造·4格
The chamber is made of
stainless steel.4 lattice



PD-4-50



GS-4T



SS-4
(220V)



SS-2
(220V)



SS-2
(60-110V)



GS-4
(60-110V)



PD-4-20



PD-4-20T



PD-2-20



实物大小比例图
The real size scale map



型号	Model	SS-2	SS-4	GS-4	PD-4-50	PD-4-20	PD-4-20T	PD-2-20
焊条容量	Electrode Capacity	5KG	5KG	5KG	50KG	20KG	20KG	20KG
最长焊条长度	Electrode Lengs	450MM			500MM	500MM	450MM	450MM
输入电压	Input Voltage	AC 220V OR AC.DC 60-110V			AC 220V	AC 220V	AC 220V	AC 220V
功率	Power	300W			1000W	1200W	1200W	1200W
工作温度	Work Temperature	30℃-150℃			50℃-400℃	50-350℃	50-350℃	50-350℃
内腔尺寸<mm>	Size of inner cavity	86×72×508			110×110×520/4格(4Grid)	65×65×520/4格 (4Grid)	65×150×520/2格 (2Grid)	65×150×520/2格 (2Grid)
外型尺寸<mm>	Overall Size(L×W×H)	545×130×115			800×310×310	690×215×215		
重量	Weight	3.5KG	4KG	4.5KG	26KG	17.8KG		17.2KG

带温度表
Thermometer

欧洲型式 Europe Type

电焊条 烘干炉、保温筒(干燥器)

ELECTRODE.FLUX, DRYER OVEN, WELDING ROD DRYER(DRYER)



PK-500



PK-300



PK-50



PK 15



SK 40



PK-410



JS-200

焊剂贮藏干燥箱
Flux Storage Cabinets

电焊条干燥存储柜
Welding rod drying storage cabinets

型号	Model	PK-500	PK-300	PK-50	PK-15	SK 40	PK-410	JS-200
温度	Temperature	50℃-500℃	300℃	50℃-350℃	50℃-300℃	50℃-180℃	50℃-400℃	50℃-300℃
容量	Capacity	135KG	136KG	50KG	15KG	120KG	252KG	200KG
电压	Voltage	110V/230V			230V		230V//400-3	230V
功率	Power	4800W	3200W	2000W	800W	700W	3.5/4.5KW	2000W
内部尺寸	Size of inner cavity(MM)	455×455×480	455×455×480	250×250×460	112×135×510	470×510×520	665×485×635	310×310×800+斜度
外部尺寸	Overall Size(L×W×H)(MM)	690×770×740	610×720×660	310×405×555	185×320×584	530×640×750	860×760×1280	510×570×1750
自重	Weight	86KG	58KG	25KG	12.5KG	55KG	230KG	115KG



PK 5



PK 5



PK 1



DS 5/400



DS 5



DS 8

型号	Model	PK 5	PK 1	DS 5/400	DS 5	DS 8
容量	Capacity	20KG	10KG	5KG		8KG
温度	Max. Temperature	50℃-350℃	100℃	150℃		
电压	Voltage	AC 230V				
功率	Power	800W	238W	205W		
焊条长度	Electrode Length	450MM		400MM	500MM	
内部尺寸	Size of inner cavity	Φ156×435	Φ110×470	Φ86×420	Φ86×509	Φ102×509
外部尺寸	Overall Size(L×W×H)	Φ380×648	218×195×600	120×140×600	170×210×720	220×225×720
自重	Weight	13KG	5.1KG	3.6KG	4.5KG	5.4KG
		带温温表 Thermometer				

带温度表
Thermometer



产品色彩客户自定
Color can be changed according to customer

欧洲型式 Europe Type 便携式电焊条干燥箱 European Type Portable Welding Electrode Oven

立式
Vertical



DYE-10

DYF-10



VB-11



VB-11S

卧式
Horizontal



AF-10

AF-5

AF-5B



NGW-10

NGW-10S

NGW-10B



SEO-5B



SEO-5



型号	Model	DYF-10	DYE-10	VB-11S	VB-11	AF-10	AF-5	AF-5B	NGW-10	NGW-10S	NGW-10B	SEO-5	SEO-5B
焊条容量 <KG>	Electrode Capacity	10KG		11KG		10KG	5KG			10KG		5KG	
输入电压 <V>	Input Voltage	AC 230V		AC 230V		AC 240V	AC 240V			AC 220V		230V OR 110V	220V
功率 <W>	Power	800W		600W			500W			700W		325W	215W
焊条长度 <MM>	Electrode Length						450MM						
最高温度 <°C>	Max. Temperature	50°C-400°C		50°C-150°C			50°C-300°C			50°C-300°C		50°C-300°C	50°C-150°C
内腔尺寸(mm)	Chamber Size	110×138×515		137×124×489		95×137×495	60×100×500	60×100×500		160×110×460		70×70×455	76×76×460
外型尺寸(mm)	Overall Size(L×W×H)	340×220×640		178×165×556		195×290×585	195×240×586	195×285×586	200×345×625	285×375×625		165×195×565	155×165×580
重量 <KG>	Weight	12.5KG	12.7KG	11.3KG	11KG	8.2KG	7.3KG	7.4KG	12KG	13KG		5.4KG	6KG

带温度表
Thermometer

(德国) 迷你型小型焊条烘干箱 (German) Mini Electrode dryer oven

- ▲用于350-450MM长度电焊条打开上盖450MM时，焊条会露出约40毫米方便取用。
- ▲配备2米电缆和插头调节温度50℃-350℃。
- ▲40MM的保温层，外壳不烫手。
- ▲可立用、倾斜位置，盖总是关闭：防止潮湿空气及雨水入侵。
- ▲内胆加热管不锈钢制作。

- ▲ length for 350-450MM welding rod to open the upper cover 450MM, welding The show will be about 40 mm for convenient use.
- ▲ is equipped with 2 meter cable and plug to regulate the temperature of 50 °C -350 °C.
- ▲ 40MM insulation layer, the shell is not hot.
- ▲ can be vertical, inclined position, the cover is always closed to prevent air and wet Rainwater intrusion.
- ▲ liner of heating pipe made of stainless steel.

The Minidryer-350 is designed to restore moist electrodes, or to pre-dry electrodes before welding when this is required. The dryer may be used with electrodes of both 350 and 450 mm length. With the cover in an open position, the electrodes will protrude approximately 40mm and are easily accessible. The Minidryer-350 is equipped with 2 m primary cable and plug. It has a thermostat for continuous selection of the temperature from 100 to 350°C (212°F to 662°F). The dryer is very robust in design and is insulated all-over with 40 mm mineral wool. It can also stand permanently in a tilted position. When the dryer is in a tilted position, the cover cannot stand open, but always closes to prevent the intrusion of unwanted moist air. When the dryer is tilted, a rim around the opening prevents rainwater from entering.

Caution:

Use gloves when handling warm electrodes from inside the Minidryer- 350. No chemical products are to be used in the dryer. This product should be used for drying electrodes only.



MINI-350



SNOL-320

SNOL-320

- ◆二个移动焊条托盘
- ◆带温度表
- ◆后部活轮、移动方便
- ◆不锈钢内胆、托盘

SNOL-320


- ◆ Two movable Electrodes Tray
- ◆ With Thermometer
- ◆ with Wheel, Easy To Move
- ◆ Stainless Steel, Tray

MINI-350	型号	Model	SNOL-320
8KG	焊条容量 <KG>	Electrode Capacity	6KG
AC 230V	输入电压 <V>	Input Voltage	AC 230V
700W	功率 <W>	Power	1000W
450MM	焊条长度 <MM>	Electrode Length	450MM
50°C-350°C	最高温度 <°C>	Max. Temperature	50°C-320°C
Φ100×460	内腔尺寸(mm)	Chamber Size	100×125×500
170×170×570	外型尺寸(mm)	Overall Size(L×W×H)	150×180×595
9.5KG	重量 <KG>	Weight	12.6KG



德国型式 **German Type**
电焊条烘干箱、保温筒
ELECTRODE DRYER OVEN, WELDING ROD DRYER

EDO- 系列
SERIES

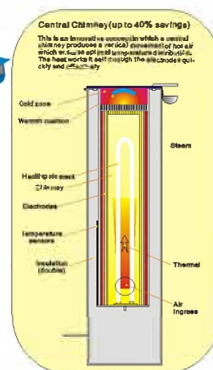

		EDO-2			EDO-5	EDO-12	
型号	Model	EDO-2-110	EDO-2-180	EDO-2-350	EDO-5-300	EDO-12-350	EDO-12-350A
焊条容量 (KG)	Electrode Capacity	10KG			25KG	50KG	
输入电压 (V)	Input Voltage	230 V					
功率 (W)	Power	100W	238W	500W	900W	1200W	
焊条长度 (MM)	Electrode Length	450MM					
最高温度 (°C)	Max. Temperature	110°C	50°C-180°C	100°C-350°C	50-300°C	50-350°C	50-350°C 50-180°C
内腔尺寸 (mm)	Chamber Size	475×90×95			475×150×156	500×240×240	
外型尺寸 (mm)	Overall Size(L x W x H)	609×155×160			609×214×220	600×300×300	
重量 (KG)	Weight	6KG	7KG	7KG	9KG	19KG	25KG

型号	Model	SFT-1	SFT-1/TR	SFT-2	SFT-4	SFT-4/4	SFT-10
焊条容量(KG)	Electrode Capacity	7KG		8.6KG	18KG		28KG
输入电压(V)	Input Voltage	AC 220V/60V-110V		AC 220V OR 110V	AC 220V		
功率(W)	Power	238W		700W	800W		1000W
焊条长度(MM)	Electrode Length	450MM					
最高温度(°C)	Max. Temperature	150°C	50°C-150°C	50°C-300°C	50°C-300°C	50°C-400°C	50°C-300°C
内腔尺寸(mm)	Chamber Size	80×80×470		90×40×470/2	140×60×470/2		240×108×470/2
外型尺寸(mm)	Overall Size(L×W×H)	138×202×546		285×252×600	290×260×600		405×440×600
重量(KG)	Weight	5.4KG	6.3KG	14.2KG	19.5KG		30.5KG

SFT- 系列
SERIES



SET-50/4



SFT-1

SFT-1/TR

SFT-2

SFT-4
SFT-4/4

SFT-10



SETO/CDTO-50




型号	Model	SET-50/4	SETO/CDTO-50	SETO/CDTO-100
焊条包数	Number of electrode packet	50	50	100
输入电压 (V)	Input Voltage	AC 230	AC 400V	AC 230V
功率 (W)	Power	3.75KW	5.2KW	6.2KW
最高温度 (°C)	Max. Temperature	400°C	400°C	400°C
内腔尺寸 (mm)	Chamber Size	610×490×510	760×670×660	1200×670×660
外型尺寸 (mm)	Overall Size (L x W x H)	1080×740×825	1380×1110×1060	1820×1110×1060
重量 (KG)	Weight	135	265	350

DHE/DHF/DHT/NG Series

电焊条干燥保温筒 ELECTRODE WELDING ROD DRYER(DRYER)

- ◆ 内胆、加热管不锈钢材料
- ◆ 配焊条提升托盘、提勾
- ◆ Internal chamber and heating tube is made of stainless steel
- ◆ Match with welding rod lifting salver and claw

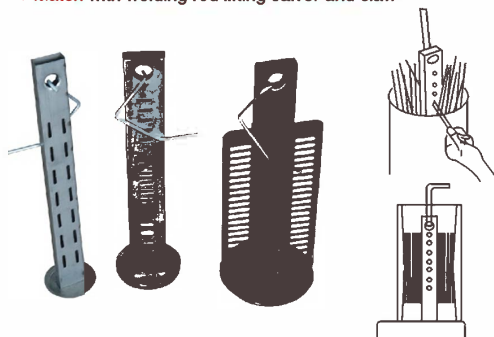

DHF-5T



DHF-10T



DHF-5



DHF-10



DHE-5



DHE-10



DHT-5

DHT-10

型号 Model	焊条容量 Electrode Capacity	焊条长度 Electrode Length	输入电压 Input Voltage	功率 Power	温度 Temperature	外型尺寸 Overall size(L×W×H)	重量 Weight
DHF-5	5kg	450mm	AC220V	800W	50°C-300°C	190×230×660mm	4.1kg
DHF-10	10kg	450mm	AC220V	800W	50°C-300°C	250×190×700mm	4.5kg
DHF-5T	5kg	450mm	AC220V	800W	50°C-300°C	190×230×660mm	4.6kg
DHF-10T	10kg	450mm	AC220V	800W	50°C-300°C	250×190×700mm	5kg
DHE-5	5kg	450mm	AC220V	800W	50°C-300°C	190×230×660mm	5.2kg
DHE-10	10kg	450mm	AC220V	800W	50°C-300°C	250×190×700mm	5.6kg



50°C-320°C



NG-5



NG-10



NG-20



DHT-10H



DHT-10H/T



DHT-5S



DHT-10S

型号 Model	NG-20	NG-10	NG-5	DHT-5	DHT-10	DHT-5S	DHT-10S	DHT-10H	DHT-10H/T
焊条容量 Electrode Capacity	20kg	10kg		5kg	10kg	5kg	10kg	10kg	10kg
输入电压 Input Voltage									
功率 Power	1200W	800W		680W	600W	700W	800W	600W	800W
最高温度 Max. Temperature									
最长焊条长度 Electrode Length									
重量 Weight	12kg	5.8kg		5.2kg	5.4kg	4.4kg	5.5kg	5.4kg	5.55kg
外型尺寸 Overall Size(L×W×H)	382φ×670H	228φ×605H		160φ×650H	230φ×650H	190×190×648	227×190×658	228φ×605H	228φ×605H
备注 Remarks	按盘设定温度 Temperature set by knob	指针显示温度 Index display temperature				按盘设定温度 Temperature set by knob			DHT-10H/T 带温度表 Thermometer



西亚地区型式 West Area Type

电焊条保温筒

ELECTRODE WELDING ROD DRYER



BMKT
<ED-1>

BMK 1
<ED-5>

BMK 1A
<ED-5A>

<BMK 2Y>
ED-10

BMK 4Y
<ED-24B>

型号	Model	BMKT <ED-1>	BMK-1 <ED-5>	BMK-1A <ED-5A>	BMK-2Y <ED-10>	BMK-18B <ED-10B>	BMK-4Y <ED-24B>
焊条容量	Electrode Capacity	2.5KG	5KG	10KG	18KG	24KG	
输入电压	Input Voltage	220-240V					
功率	Power	无电热 No electric heating					
最高温度	Max. temperature	150℃	50℃-200℃	50℃-200℃	50℃-200℃	50℃-150℃	50℃-300℃
最长焊条长度	Max. electrode length	450MM	450MM	450MM	450MM	450MM	450
内胆尺寸<MM>	Chamber Size	Φ60×480	Φ74×480	Φ82×480	Φ145×480	Φ178×480	
外径×高度(MM)		Φ110×500	Φ123×500	Φ145×500	Φ208×600	Φ274×600	
重量	Weight	1.8KG	3.1KG	3.8KG	4.7KG	7.1KG	14KG



BMK 18B

BMK 1K

BMK 2K

BMK 4K

BMK 6K

型号	Model	BMK-1	BMK 2K	BMK 4K	BMK 8K
焊条容量	Electrode Capacity	8KG	24KG	35KG	40KG
输入电压	Input Voltage	220V-240V			
功率	Power	400W	800W	800W	
最高温度	Max. temperature	50℃-200℃	50℃-300℃		
最长焊条长度	Max. electrode length	450MM	500MM		
内胆尺寸<MM>	Chamber Size	Φ98×470	190×190×510	220×220×510	260×260×510
外径×高度(MM)		230×250×550	270×270×750	300×300×750	340×340×750

印度型式 India Type

EQ-50SiW

Capacity:22.7 kg/50Lbs

22.7 Kg Capacity

220V-110V-70V-48V

350 Watts

15.000kg

1 pcs

Pull-out Handle

insulated model

150mm Wheel

Adjustable Thermostat

Adjustable Digital Temperature Controller

EQ-50Si

Capacity:22.7 kg/50Lbs

22.7 Kg Capacity

220V-110V-70V-48V

350 Watts

12.000kg

1 pcs

Insulated model

Adjustable Thermostat

EQ-50SiDT

Capacity:22.7 kg/50Lbs

22.7 Kg Capacity

220V-110V-70V-48V

350 Watts

12.000kg

1 pcs

Insulated model

Adjustable Digital Temperature Controller

EQ-50-SiD

Capacity:22.7 kg/50Lbs

22.7 Kg Capacity

110V-220V Dual Voltage

350 Watts

12.000kg

1 pcs

Insulated

Dual Voltage

Adjustable Thermostat

EQ-20RiHH

Capacity:9 kg/20Lbs

9 Kg Capacity

220V-110V-70V-48V

250 Watts

6.050kg

2 pcs

Insulated model

Adjustable Thermostat

EQ-20RiDDT

Capacity:9 kg/20Lbs

9 Kg Capacity

110V-220V Dual Voltage

250 Watts

6.050kg

2 pcs

Insulated model

Dual Voltage

Adjustable Digital Temperature Controller

EQ-20Ri

Capacity:9 kg/20Lbs

9 Kg Capacity

220V-110V-70V-48V

250 Watts

6.050kg

2 pcs

Insulated model

Adjustable Thermostat

EQ-20SiD

Capacity:9 kg/20Lbs

9 Kg Capacity

110V-220V Dual Voltage

250 Watts

7.150kg

2 pcs

Insulated model

Dual Voltage

Adjustable Thermostat

EQ-20SiDT

Capacity:9 kg/20Lbs

9 Kg Capacity

220V-110V-70V-48V

250 Watts

7.150kg

2 pcs

Insulated model

Adjustable Digital Temperature Controller

EQ-10SiDT

Capacity:5 kg/10Lbs

5 Kg Capacity

220V-110V-70V-48V

65 Watts

4.160kg

4 pcs

Insulated model

Adjustable Digital Temperature Controller

东南亚 TRB系列 Southeast Asia TRB Series

电焊条保温筒

ELECTRODE WELDING ROD DRYER

◆ 配AC220V、AC、DC60V-110V两种电源线、托盘、提勾 < 插座式 >

◆ With AC220V、AV、DC60V-110V two types of power wires,slaver and cleaner. < socket type >



AC/DC 60-110V电源线

AC/DC 60-110V Power Cord



AC 220V 电源线

AC 220V Power Cord

◆ 插座式两种电源均可使用

◆ AC/DC two kind of power can be used

◆ 内胆材料: 镀锌板、需要不锈钢材料另注明

◆ The chamber material: galvanized plate, stainless steel material is optional

◆ 内筒四周电热丝加热

◆ Heating wire wraps around the inner tube

Capacity:5KG 容量5KG



TRB-5E



TRB-5E/T



TRB-5E/B



TRB-5E/F



TRB-5K



TRB-5KB



TRB-5KB/T



TRB-5F



TRB-5FB



TRB-5A



TRB-5/B



TRB-5A/F

盖部形式
Cover form

5E型



5K型



5A型



产品色彩由你而定
Product color is optional

标准插座

Standard socket

筒内接线

Connect inside of Cylinder

插座旁装

socket beside

调温器

Thermostat

防脱落安全插头

Safe plug from dropping

电源连接方式 (The Way of power plug)

型号	Model	TRB-5E	TRB-5E/T	TRB-5E/B	TRB-5E/F	TRB-5K	TRB-5KB	TRB-5KB/T	TRB-5F	TRB-5FB	TRB-5A	TRB-5/B	TRB-5A/F
焊条容量	Electrode Capacity	5KG				5KG				5KG			
输入电压	Input Voltage	AC220V/230V AC/DC 60-110V				AC220V/230V AC/DC 60-110V				AC220V/230V AC/DC 60-110V			
功率	Power	238W/50W-100W				238W/50W-100W				238W/50W-100W			
最高温度	Max.Temperature	150℃	200℃	200℃	150℃	150℃	50℃-200℃	50℃-200℃	150℃	50℃-200℃	150℃	50℃-200℃	150℃
最长焊条长度	Electrode Length	450MM				450MM				450MM			
外型尺寸	Overall Size(L×W×H)	168×188×610				168×188×635				168×188×490			
重量	Weight	3.0	3.2	3.1	3.2	3.0	3.2	3.3	3.2	3.3	2.9	3.0	3.0
Package Size		55×42.5×65.5				55×42.5×65.5				55×42.5×66.5			
Package Number		6只装				6只装				6只装			

东南亚 TRB系列 Southeast Asia TRB Series

电焊条保温筒

ELECTRODE WELDING ROD DRYER

容量10KG Capacity:10KG

Heated by heating wire around the inner tube
内筒圆周电热丝加热

内筒中心加热管加热
Heated by heating tube in the center



TRB-10K



TRB-10KB



TRB-10KB/T



TRB-10E



TRB-10E/B




TRB-10A



TRB-10F



TRB-10FB



型号	Model	TRB-10K	TRB-10KB	TRB-10KB/T	TRB-10E	TRB-10E/B	TRB-10A	TRB-10F	TRB-10FB
焊条容量	Electrode Capacity	10KG	10KG	10KG	10KG	10KG	10KG	10KG	10KG
输入电压	Input Voltage	AC220V/230V AC/DC60-110V	AC 230V	AC220V/230V AC/DC60-110V	AC 230V	AC220V/230V AC/DC60-110V	AC 230V	AC 230V	AC/DC 60V-110V
功率	Power	238W/100W-195W	238W	238W/100W-195W	238W	238W/100W-195W	238W	238W	700W
最高温度	Max. Temperature	150°C±15°C	50°C-200°C	150°C±15°C	50°C-200°C	150°C±15°C	150°C	150°C	50°C-150°C
最长焊条长度	Electrode Length	450MM							
外型尺寸	Overall Size(L×W×H)	202×232×646mm	Φ230×646mm	202×232×615mm	202×232×615mm	202×232×615mm	202×232×550mm	Φ230×620H	Φ230×620H
重量	Weight	4.3KG	5.1KG	4.2KG	4.2KG	4.2KG	5KG	5KG	5.2KG
包装尺寸	Package Size	51×45×69	50.5×50.5×69	51×45×67	50.5×50.5×67	51×45×67	51×45×56.5	50.5×50.5×67	50.5×50.5×67
包装数量	Package Number	4只装							

TRE系列 TRE Series


容量5KG/10KG Capacity:5KG/10KG




TRE-5



TRE-10



TRE-5W

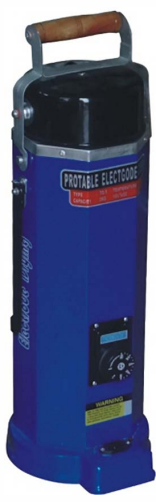

TRE-10W



TRE-5W/T



TRE-10W/T



TRE-5B

坚固的卷边底盘
耐用性强
Solid edge rolling chassis
Strong durability



型号	Model	TRE-5	TRE-10	TRE-5W	TRE-10W	TRE-5W/T	TRE-10W/T	TRE-5B
焊条容量	Electrode Capacity	5KG	10KG	5KG	10KG	5KG	10KG	5KG
输入电压	Input Voltage	AC230V AC/DC 60-110V						
功率	Power	238W/100W-195W						
最高温度	Max. Temperature	150°C±15°C						
最长焊条长度	Electrode Length	450MM						
外型尺寸	Overall Size(L×W×H)	168×188×610	202×232×615	168×188×610	202×232×615	168×188×610	202×232×615	168×188×610
重量	Weight	3.3KG	4.7KG	3.4KG	4.8KG	3.5KG	4.9KG	3.5KG

日式 Japanese Type

电焊条保温筒

ELECTRODE WELDING ROD DRYER


◆ Heated by the heating tube in the center of chamber




最高温度 $<180^{\circ}\text{C}$

控温150℃

调温50°C-150°C

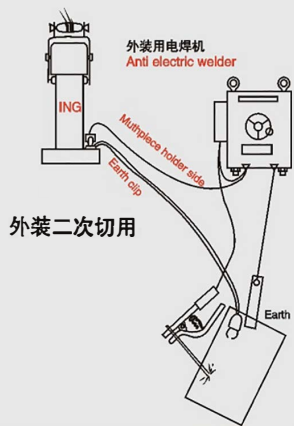

LPO 5T

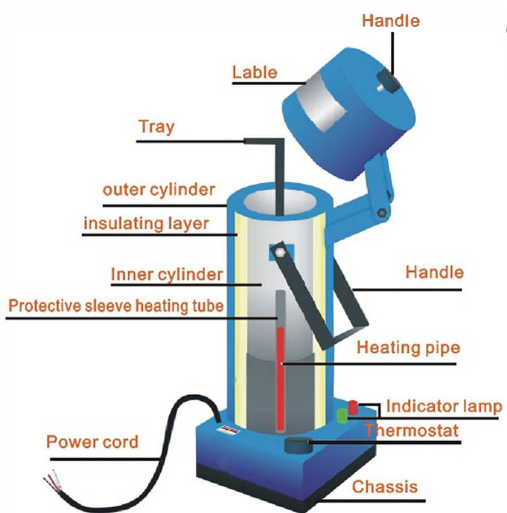

Additional requirements



Horizontal movable support.



Back cover spring

不锈钢内胆
Stainless steel liner

350MM

400MM



Pack straps

The buckle

H-5FD

磁铁

Large chassis

型号	Model	H-5	H-5T	H-5K	H-5F	H-5FB	H-5FD	H-10F	LPO 5	LPO 5T
焊条容量	Electrode Capacity	5KG						10KG	5KG	
输入电压	Input Voltage	AC 220V		AC 220W/110V	AC.DC 60-110V			AC.DC 60-110V	110V/220V	
功率	Power	320W							400W	
最高温度	Max.Temperature	50°C-320°C		150°C	150°C	50°C-150°C	150°C	150°C	50°C-320°C	
最长焊条长度	Electrode Length	450MM								
内腔尺寸	Chamber Size	φ 78X(400+65)H						φ110X(400+65)H	φ78X(400+65)H	
外型尺寸	Overall Size(L×W×H)	φ 190X548H		φ 175X548H			178X215X548	φ230×560	175×175×560	
重量	Weight	3.1kg		3kg	3kg	3.1kg	3.4kg	5kg	3.8kg	3.82kg
温度表	THERMOMETER	有 HAVE							无 NONE	有 HAVE

韩式 Korean 电焊条保温筒 ELECTRODE WELDING ROD DRYER

- ◆ YCH-5、YCH-5K、5T调温50°C-200°C
- ◆ DSE-5 调温50°C-300°C内胆不锈钢
- ◆ TRB-5 系列为自控温度150°C

- ◆ YCH-5、YCH-5K、5T ThermoStat 50°C-200°C
- ◆ DSE-5 Stainless Steel Tank Thermostat 50°C-300°C
- ◆ TRB-5W Series For The Set Temperature of 150°C



		圆型							方型									
型号	Model	YCH-5B	YCH-5	YCH-5T	DSE-5	YCH-5B/550	YCH-5B/700	YCH-5/700	YCH-5K	YCH-5K/T	YCH-5T/700	TRB-5W/T 400	TRB-5W/450	TRB-5W/400	TRB-5W/500	TRB-5W/550		
焊条容量	Electrode Capacity	5KG				450MM-5KG			5KG		450MM-5KG		5KG					
输入电压	Input Voltage	AC 220V OR AC.DC 110V			AC 220V	AC 220V AC.DC 110V		AC 220V	AC 220V AC.DC 60V-110V			AC.DC 60V-110V						
功率	Power	238W				350W		500W	238W		500W		238W					
焊条长度	Electrode Length	450MM				550MM	700MM		450MM		700MM		400 MM	450 MM	400 MM	500 MM	550MM	
最高温度	Max.Temperature	150°C	50°C×200°C		50°C×300°C	150°C		50°C-200°C	50°C-200°C			150°C						
内腔尺寸(mm)	Chamber Size	Φ87×468H				Φ87×565H			Φ82×(426+40)		Φ87×(680+40)		Φ82×(380+40)	Φ82×(430+40)	Φ82×(480+40)	Φ82×(530+40)	Φ82×(580+40)	
外型尺寸(mm)	Overall Size(L×W×H)	139×235×566				139×235×632		135×235×782	139×235×813		170×268×564		170×295×814	293×145×498	239×145×548	239×145×598	293×145×648	293×145×698
重量	Weight	3.4KG	3.6KG	3.75KG	4KG	3.9KG	4.1KG	4.25KG	3.8KG	3.9KG	4.35KG	3.1KG	3.4KG	3.6KG	3.8KG	4KG		



瑞典型式 Swedish Type

电焊条 烘干炉、保温筒(干燥器)
焊剂

ELECTRODE .FLUX DYRER, INSULATING OVEN, WELDING ROD DRYER (BARREL)

叙利亚型式 Syria Type



EP102N



EP300N



E350 PN tri



N120N



型号	MODEL	EP 102 N	EP 300 N	E 350 PN tri	N120	CKPH-5K	CKPH-09K	CKPH-20K
电压	VOLTAGE	AC 220V/AC.DC 24V	AC 220V	AC 220V-380V	AC 220V-380V	AC 220V		
功率	POWER	220W	300W	2400W	3000W	150 W	250 W	650 W
容量	CAPACITY	5KG/450MM	15KG/450MM	80KG/450MM	120KG	5KG/450MM	9KG/450MM	20KG/450MM
温度	TEMPERATURE	120℃	120℃	50℃-350℃	50℃-350℃	40℃-150℃	40-150℃	40℃-200℃
外形尺寸	OUTSIDE	Φ225×535	575×260×250	776×543×1142	680×800×1100	150×600MM	190×600MM	600×310×380MM
内腔尺寸	INSIDE	Φ82.5×480	Φ130×480	490×360×450	430×535×550+斜度	85×490MM	120×490MM	80×490MM
自重	WEIGHT	5.5KG	11KG	100KG	105KG	4.6KG	6.8KG	12KG

突尼斯型式 Tunisia Type



EKF-1P

ETIP



4格托盘
4 grid tray

6格托盘
6 grid tray

卧立两用
horizontal and vertical dual-use

BKF-4P

型号	MODEL	EKF-1P	ET1P	EKF-4P/6P
容量	CAPACITY	100 Pcs Φ4X450mm rod 7Kg	100 Pcs Φ4X450mm rod 7Kg	28KG
温度	TEMPERATURE	125℃(Sbt)	Thermos	50℃-300℃
电压	VOLTAGE	24-48-110-220 Volt AC	Thermos	110V-220V AC
功率	POWER	150W	Thermos	900W
内腔尺寸	INTERNAL SIZE	Φ80mmx450mm	Φ80mmx450mm	4P 175×175×480MM 6P 115×245×480MM
外型尺寸	EXTERNAL SIZE	145X210X545MM	145X210X545MM	270×285×660MM
自重	WEIGHT	3.2KG	2.5KG	20KG

秘鲁型式 Peru Type



CKPH-5K



CKPH-09K



CKPH-20K

法国型式 French Type



SEE-2

SEE-2/B

SEE-4A



SEE-1A

SEE-1A/B

SEE-1

SEE-1/B

型号	Model	SEE-1A	SEE-1A/B	SEE-1	SEE-1/B	SEE-2	SEE-2/B	SEE-4A
焊条容量(KG)	Electrode Capacity	5KG	5KG	14KG		20KG		10KG
输入电压(V)	Input Voltage	AC 230 V AC.DC 60V-110V						
功率(W)	Power	300W	300W	500W		600W		800W
焊条长度(MM)	Electrode Length	450MM						
最高温度(℃)	Max.Temperature	150℃	50℃-200℃	150℃	50℃-200℃	150℃	50℃-200℃	50℃-350℃
内腔尺寸(mm)	Chamber Size	Φ90×487	Φ90×487	Φ128×487		143×135×487		114×40×487/2
外型尺寸(mm)	Overall Size(L×W×H)	162×200×583	162×200×583	225×290×583		225×290×583		225×342×652
重量(KG)	Weight	4.5KG	4.7KG	6.2KG	6.4KG	9.2KG	9.4KG	16.7KG