



6290

Size	Thickness	Orifice
000	1-5	0.8
00	5-10	0.9
0	10-15	1.0
1	15-25	1.2
2	25-50	1.6
3	50-100	2.0
4	100-175	2.4
5	175-250	2.8
6	250-300	3.2



6290AC

Size	Thickness	Orifice
000	1-5	0.8
00	5-10	0.9
0	10-15	1.0
1	15-25	1.2
2	25-50	1.6
3	50-100	2.0
4	100-175	2.4
5	175-250	2.8
6	250-300	3.0



6290NX

Size	Thickness	Orifice
000	1-5	0.8
00	5-10	0.9
0	10-15	1.0
1	15-25	1.2
2	25-50	1.6
3	50-75	2.0
4	75-150	2.4
5	150-200	2.8
6	200-300	3.2



6290NFF

Size	Thickness	Orifice
000	1-5	0.8
00	5-10	0.9
0	10-15	1.0
1	15-25	1.2
2	25-50	1.6
3	50-75	2.0
4	75-150	2.4
5	150-200	2.8
6	200-300	3.2



6290VVC

Size	Thickness	Orifice
5/0	1-4	0.5
4/0	4-6	0.8
000	6-9	0.9
00	9-12.5	0.96
0	12.5-20	1.0
1/2	20-35	1.1
1	35-60	1.2
1 1/2	60-75	1.4
2	75-125	1.5
2 1/2	125-150	1.7
3	150-175	1.9
4	175-200	2.1
5	200-225	2.4
5 1/2	225-250	2.9



6290VVCP

Size	Thickness	Orifice
5/0	1-4	0.5
4/0	4-6	0.8
000	6-9	0.9
00	9-12.5	0.96
0	12.5-20	1.0
1/2	20-35	1.1
1	35-60	1.2
1 1/2	60-75	1.4
2	75-125	1.5
2 1/2	125-150	1.7
3	150-175	1.9
4	175-200	2.1
5	200-225	2.4



6290VVC

Size	Thickness	Orifice
5/0	1-4	0.5
4/0	4-6	0.8
000	6-9	0.9
00	9-12.5	0.96
0	12.5-20	1.0
1/2	20-35	1.1
1	35-60	1.2
1 1/2	60-75	1.4
2	75-125	1.5
2 1/2	125-150	1.7
3	150-175	1.9
4	175-200	2.1
5	200-225	2.4



6290NH

Size	Thickness	Orifice
5NH		3.3
6NH	250-275	3.5
7NH	275-300	3.8
8NH	300-380	4.0



6290G

Size	Thickness	Orifice
1	3x6mm	1.4
2	3x10mm	2.2
3	6x13mm	2.9



6290GG

Size	Thickness	Orifice
1	3x6mm	1.8
2	3x10mm	2.1
3	6x13mm	2.5



NFW

Size	Thickness	Orifice
1	3x6mm	1.8
2	3x10mm	2.1
3	6x13mm	2.5



6290NXP

Size	Thickness	Orifice
000	1-5	0.8
00	5-10	0.9
0	10-15	1.0
1	15-25	1.2
2	25-50	1.6
3	50-75	1.9
4	75-150	2.4
5	150-200	2.8
6	200-300	3.3



6290NXM

Size	Thickness	Orifice
000	1-5	0.8
00	5-10	0.9
0	10-15	1.0
1	15-25	1.2
2	25-50	1.6
3	50-75	1.9
4	75-150	2.4
5	150-200	2.8
6	200-300	3.3



3690AC

Size	Thickness
3690-00AC	1-6
3690-0AC	6-13
3690-1AC	13-25
3690-2AC	25-75



3690P

Size	Thickness
3690-00P	1-6
3690-0P	6-13
3690-1P	13-25
3690-2P	25-75



H1F

Model	H1F
Size	A10, A25, A50, A75, A100



HA211/411

Size	Thickness	Orifice
1	1-3	0.6
2	3-8	0.8
3	8-20	1.0
4	20-50	1.4
5	50-100	2.0



1-101

Size	Thickness	Orifice
000	1-3	0.7
00	3-6	0.8
0	6-10	1.0
1	10-20	1.2
2	20-40	1.5
3	40-60	1.8
4	60-80	2.1
5	80-125	2.5
6	125-200	3.1
7	200-250	3.6
8	250-300	4.1



3-101

Size	Thickness	Orifice
000	0-3	0.7
00	3-6	0.8
0	6-10	1.0
1	10-20	1.2
2	20-40	1.5
3	40-60	1.8
4	60-80	2.1
5	80-125	2.5
6	125-200	3.1
7	200-250	3.6
8	250-300	4.1



GPN

Size	Thickness	Orifice
000	1-3	0.7
00	3-6	0.8
0	6-10	1.0
1	10-20	1.2
2	20-40	1.5
3	40-60	1.8
4	60-80	2.1
5	80-125	2.5
6	125-200	3.1
7	200-250	3.6
8	250-300	4.1



3-GPN

Size	Thickness	Orifice
000	0-3	0.7
00	3-6	0.8
0	6-10	1.0
1	10-20	1.2
2	20-40	1.5
3	40-60	1.8
4	60-80	2.1
5	80-125	2.5
6	125-200	3.1
7	200-250	3.6
8	250-300	4.1



GPP

Size	Thickness	Orifice
000	0-3	0.7
00	3-6	0.8
0	6-10	1.0
1	10-20	1.2
2	20-40	1.5
3	40-60	1.8
4	60-80	2.1
5	80-125	2.5
6	125-200	3.1
7	200-250	3.6
8	250-300	4.1



3-GPP

Size	Thickness	Orifice
000	0-3	0.7
00	3-6	0.8
0	6-10	1.0
1	10-20	1.2
2	20-40	1.5
3	40-60	1.8
4	60-80	2.1
5	80-125	2.5
6	125-200	3.1
7	200-250	3.6
8	250-300	4.1



GPM

Size	Thickness	Orifice
000	1-3	0.7
00	3-6	0.8
0	6-10	1.0
1	10-20	1.2
2	20-40	1.5
3	40-60	1.8
4	60-80	2.1
5	80-125	2.5
6	125-200	3.1
7	200-250	3.6
8	250-300	4.1



MTHN

Size	Thickness	Orifice
00	3-6	0.8
0	6-10	1.0
1	10-20	1.2
2	20-40	1.5
3	40-60	1.8
4	60-80	2.1
5	80-125	2.5



HPN

Size	Thickness	Orifice
1	10-20	1.2
2	20-40	1.5
3	40-60	1.8
4	60-80	2.1
5	80-125	2.5
6	125-200	3.1
7	200-250	3.6
8	250-300	4.1
10	300-380	4.7
12	380-450	5.6



1-118

Size	Orifice
0	1.0
2	1.5
4	2.1
6	2.1
8	2.4



3-118

Size	Orifice
0	1.0
2	1.5
4	2.1



1-218

Size	Orifice
0	1.0
2	1.5
4	2.1
6	2.1
8	2.4



1-108

Size	Thickness	Orifice
0	6-10	1.0
1	10-20	1.2
2	20-40	1.5
3	40-60	1.8
4	60-80	2.1



1-318MP

Model	1-318MP
Size	#2, #4



1-303MP



TYPE55

Size	#8, #10, #12
------	--------------



138

Size	Thickness	Orifice
00	1-3	0.8
0	3-6	1.0
1	6-10	1.2
2	10-20	1.4
3	20-40	1.6
4	40-60	1.8
5	60-100	2.0
6	100-150	2.4
7	150-200	2.8
8	200-250	3.2
9	250-300	3.6
10	300-350	4.2



144

Size	Thickness	Orifice
00	1-3	0.8
0	3-6	1.0
1	6-10	1.2
2	10-20	1.4
3	20-40	1.6
4	40-60	1.8
5	60-100	2.0
6	100-150	2.4
7	150-200	2.8
8	200-250	3.2
9	250-300	3.6
10	300-350	4.2



164

Size	Thickness	Orifice
00	1-3	0.8
0	3-6	1.0
1	6-10	1.2
2	10-20	1.4
3	20-40	1.6
4	40-60	1.8
5	60-100	2.0
6	100-150	2.4
7	150-200	2.8
8	200-250	3.2
9	250-300	3.6
10	300-350	4.2



ASP

Size	Thickness	Orifice
72/ 000	1-3	0.6
60/ 00	3-6	0.8
65/ 00 1/2	6-10	0.9
60/ 0	10-15	1.0
56/ 1	15-25	1.2
54/ 1 1/2	25-50	1.4
52/ 2	50-100	1.6
49/ 3	100-150	1.9
44/ 4	150-200	2.2
38/ 5	200-250	2.6
31/ 6	250-300	3.0



261

Size	Thickness	Orifice
00	1-3	0.8
0	3-6	1.0
1	6-10	1.2
2	10-20	1.4
3	20-40	1.6
4	40-60	1.8
5	60-100	2.0
6	100-150	2.4
7	150-200	2.8
8	200-250	3.2
9	250-300	3.6
10	300-350	4.2



263/275

Size	Thickness	Orifice
00	1-3	0.8
0	3-6	0.9
1	6-10	1.0
2	10-20	1.2
3	20-40	1.6
4	40-60	1.9
5	60-100	2.2
6	100-150	2.5
7	150-200	2.7
8	200-250	3.2
9	250-300	3.4
10	300-350	3.6



229

Size	Thickness	Orifice
00	1-3	0.6
0	3-6	0.8
1	6-10	1.0
2	10-20	1.2
3	20-40	1.4
4	40-60	1.6
5	60-100	1.8
6	100-150	2.5
7	150-200	2.7
8	200-250	3.2
9	250-300	3.4
10	300-350	3.6



375/363/H-MS

Size	Thickness	Orifice
00	1-3	0.6
0	3-6	0.8
1	6-10	1.0
2	10-20	1.2
3	20-40	1.4
4	40-60	1.6
5	60-100	1.8
6	100-150	2.5
7	150-200	2.7
8	200-250	3.2
9	250-300	3.4
10	300-350	3.6



245/AFS

Size	Thickness	Orifice
00	1-5	0.6
0	5-10	0.8
1	10-15	1.0
2	15-25	1.2
3	25-40	1.4
4	40-60	1.6
5	60-100	1.9
6	100-200	2.5
7	200-300	3.3
8	300-350	4.3



209F

Size	Thickness	Orifice
000	1-3	0.7
00	3-6	0.8
0	6-10	1.0
1	10-15	1.2
2	15-25	1.4
3	25-50	1.6
4	50-100	1.8
5	100-150	2.1
6	150-200	2.5



195

Size	Orifice
1	1.3
2	1.6
3	1.8
4	2.0
5	2.2



196

Size	#8, #10, #12
------	--------------



AFH/345

Size	Thickness	Orifice
72/ 000	1-3	0.6
60/ 00	3-6	0.8
65/ 00 1/2	6-10	0.9
60/ 0	10-15	1.0
56/ 1	15-25	1.2
54/ 1 1/2	25-50	1.4
52/ 2	50-100	1.6
49/ 3	100-150	1.9
44/ 4	150-200	2.2
38/ 5	200-250	2.6
31/ 6	250-300	3.0



183/185

Size	Orifice
6	1.2
8	1.7
10	2.1
12	2.9



102

Size	Thickness	Orifice
00	0-5	0.8
0	5-10	1.0
1	10-15	1.2
2	15-30	1.4
3	30-40	1.6
4	40-50	1.8
5	50-100	2.0
6	100-150	2.4
7	150-250	2.8
8	250-300	3.2



102D7

Size	Thickness	Orifice
1	5-10	0.6
2	10-20	0.8
3	20-40	1.0
4	40-60	1.25
5	60-100	1.5
6	100-150	1.75
7	150-180	2.0
8	180-220	2.3



106

Size	Thickness	Orifice
00	0-5	0.8
0	5-10	1.0
1	10-15	1.2
2	15-30	1.4
3	30-40	1.6
4	40-50	1.8
5	50-100	2.0
6	100-150	2.4
7	150-250	2.8
8	250-300	3.2



106D7

Size	Thickness	Orifice
1	5-10	0.6
2	10-20	0.8
3	20-40	1.0
4	40-60	1.25
5	60-100	1.5
6	100-150	1.75
7	150-180	2.0
8	180-220	2.3



3040G

Size	Thickness	Orifice
00	0-5	0.8
0	5-10	1.0
1	10-15	1.2
2	15-30	1.4
3	30-40	1.6
4	40-50	1.8
5	50-100	2.0
6	100-150	2.4
7	150-250	2.8
8	250-300	3.2



3080/3051

Size	Thickness	Orifice
00	0-5	0.7
0	5-10	0.8
1	10-15	1.0
2	15-30	1.3
3	30-40	1.6
4	40-50	1.9
5	50-100	2.3
6	100-150	2.7
7	150-250	3.0
8	250-300	3.3
9	300-350	3.6



3980B

Size	Thickness	Orifice
6		2.1
8		2.5



CHIYODA ST8-p

Size	Thickness	Orifice
1	1-5	0.7
2	5-10	0.9
3	10-30	1.1
4	30-50	1.3



SC12

Size	Thickness	Orifice
000	3	0.6
00	5	0.8
0	10	1.0
1	15	1.2
2	30	1.4
3	50	1.7
4	100	2.0
5	200	2.4
6	300	2.9
7	350	3.6



SC50

Size	Thickness	Orifice
00	5	0.8
0	10	1.0
1	15	1.2
2	30	1.4
3	50	1.7
4	100	2.1
5	200	2.4
6	300	2.9
7	350	3.6
8	400	4.4
9	500	5.3



SC56

Size	Thickness	Orifice
00	5	0.8
0	10	1.0
1	15	1.2
2	30	1.4
3	50	1.7
4	100	2.1
5	200	2.4
6	300	2.9
7	350	3.6
8	400	4.4
9	500	5.3



SC40

Size	Thickness	Orifice
00	5	0.8
0	10	1.0
1	15	1.2
2	30	1.4
3	50	1.7
4	100	2.1
5	200	2.4
6	300	2.9



SC60

Size	Thickness	Orifice
00	5	0.8
0	10	1.0
1	15	1.2
2	30	1.4
3	50	1.7
4	100	2.1
5	200	2.4
6	300	2.9



SC90

Size	Thickness	Orifice
00	5	0.8
0	10	1.0
1	15	1.2
2	30	1.4
3	50	1.7
4	100	2.1
5	200	2.4
6	300	2.9



SC13

Size	Orifice
1	1.2
3	1.8
5	2.4



SC21A

Size	Thickness	Orifice
00	3	0.6
0	6	0.8
1	10	0.9
2	25	1.1
3	38	1.2
4	63	1.4
5	100	1.8



MC12

Size	Thickness	Orifice
00	5	0.8
0	10	1.0
1	15	1.2
2	30	1.4
3	50	1.7
4	100	2.1
5	150	2.4



MC40

Size	Thickness	Orifice
00	5	0.8
0	10	1.0
1	15	1.2
2	30	1.4
3	50	1.7
4	100	2.1



MC60

Size	Thickness	Orifice
00	5	0.8
0	10	1.0
1	15	1.2
2	30	1.4
3	50	1.7
4	100	2.1



1502

Size	Thickness	Orifice
2	6	0.6
3	12	0.8
4	100	2.1
6	100	2.1
8	200	2.5
10		2.8
12	300	3.0
16	300-400	4.1
18	400-460	4.6
20	-500	5.1



1503

Size	Thickness	Orifice
2	3	0.6
3	10	0.8
4	16	1.0
6	38	1.5
8	100	2.1
10	150	2.5
12	200	3.0
14	250	3.6
16	350	4.2



1534

Size	Thickness	Orifice
2	3	0.6
3	10	0.8
4	16	1.0
6	38	1.5
8	100	2.1
10	150	2.5
12	200	3.0
14	250	3.6
16	350	4.2



1535

Size	Thickness	Inter	Exter
31	13	14Z56	14Z38
40	19	14Z57	14Z38
43	25	14Z58	14Z38
47	32	14Z59	14Z38
52	38	14Z60	14Z38
60	50-75	14Z61	14Z39
80	125-200	14Z64	14Z39
L-100			



1511

Size	Thickness	Orifice
13	15×14	1.3
19	15×15	1.9
25	15×16	2.4



1515

Size	Thickness	Orifice
1/2	2-13	1.0
1-1/2	13-38	1.5
4	50-100	2.1
8	100-200	2.5
12	200-300	3.0
16	300-400	4.1
18	400-450	4.5
20	450-	5.1



1566HS

Size	Thickness	Orifice
1/2	13	0.7
3/4	19	0.9
1	25	1.0
1-1/2	38	1.2
2	50	1.4
2-1/2	64	1.5
4	100	1.7
6	150	2.0
8	200	2.2
10	250	2.4
14	350	2.8



OFS

Size	Thickness	Orifice
1/2	13	0.8
3/4	19	0.9
1	25	1.0
1-1/2	38	1.2
2	50	1.4
2-1/2	64	1.5
4	100	1.6
6	150	1.9
8	200	2.2
10	250	2.4
14	350	2.8



4202

Size	Thickness	Orifice
2	3	0.7
3	6	0.8
4	13	1.0
5	38	1.3
7	100	1.8
9	150	2.3
11	250	2.8
13	300	3.2



4203

Size	Thickness	Orifice
4	9-15	1.0
5	19-38	1.3
7	50-100	1.8
9	125-150	2.3



4207

Size	Orifice
13	1.3
19	1.9



4213

Size	Thickness	Orifice
3	9	0.8
4	15	1.0
6	38	1.5
8	127	1.8
10	254	2.3
12	300	2.5
14	350	2.8



P-FS

Size	Thickness	Orifice
3	9	0.8
4	15	1.0
6	38	1.5
8	127	1.8
10	254	2.3
12	300	2.5



Type44

Size	Thickness	Orifice
6	3-6	0.6
8	6-12	0.8
12	12-20	1.2
15	25-75	1.5
20	100-125	2.0
24	150-200	2.4
32	225-300	3.2



Type41

Size	Thickness	Orifice
6	1-6	0.6
8	6-10	0.8
12	12-20	1.2
15	25-75	1.5
20	100-125	2.0
24	150-200	2.4
32	225-300	3.2
48	300-400	4.8



41-32GS



44-32GS



41-GB

Model	41-GB
Size	#32, #48, #64



44-GB

Model	44-GB
Size	#32, #48, #64



Type51

Size	Thickness	Orifice
00	0-5	0.8
0	5-10	1.0
1	10-15	1.2
2	15-30	1.4
3	30-40	1.6
4	40-50	1.8
5	50-100	2.0
6	100-150	2.4
7	150-250	2.8
8	250-300	3.2



Type54

Size	Thickness	Orifice
00	0-5	0.8
0	5-10	1.0
1	10-15	1.2
2	15-30	1.4
3	30-40	1.6
4	40-50	1.8
5	50-100	2.0
6	100-150	2.4
7	150-250	2.8
8	250-300	3.2



44-20*9HT



41-6SM



41-10*12HT



41-15RC



G1-A

Size	Thickness	Orifice
7/10	3-10	0.7
10/10	10-25	1.0
12/10		1.2
16/10	25-80	1.6
20/10	80-120	2.0
25/10	120-200	2.5
30/10	200-300	3.0



G1-P

Size	Thickness	Orifice
7/10	3-10	0.7
10/10	10-25	1.0
12/10		1.2
16/10	25-80	1.6
20/10	80-120	2.0
25/10	120-200	2.5
30/10	200-300	3.0



G1-N

Size	Thickness	Orifice
7/10	3-10	0.7
10/10	10-25	1.0
12/10		1.2
16/10	25-80	1.6
20/10	80-120	2.0
25/10	120-200	2.5
30/10	200-300	3.0



G1-ARCNM

Model	G1-ARCNM
-------	----------



81021

Size	Thickness	Orifice
1	3-20	1.0
2	20-50	1.4
3	50-100	1.8



81021P

Size	Thickness	Orifice
1	3-20	1.0
2	20-50	1.4
3	50-100	1.8



PHL-P

Size	Thickness	Orifice
1	3-10	0.7
2	10-20	1.1
3	20-50	1.5
4	50-100	1.8



PHL-M

Size	Thickness	Orifice
1	3-10	0.7
2	10-20	1.1
3	20-50	1.5
4	50-100	1.8



PHL

Size	Thickness	Orifice
1	3-10	0.7
2	10-20	1.1
3	20-50	1.5
4	50-100	1.8



GK1-B

Size	Thickness	Orifice
1	5-10	0.6
2	10-20	0.8
3	20-40	1.0
4	40-60	1.25
5	60-100	1.5
6	100-150	1.75
7	150-180	2.0
8	180-220	2.3



GK1-A

Size	Thickness	Orifice
1	5-10	0.6
2	10-20	0.8
3	20-40	1.0
4	40-60	1.25
5	60-100	1.5
6	100-150	1.75
7	150-180	2.0
8	180-220	2.3



GK3-B

Size	Thickness	Orifice
1	5-10	0.6
2	10-20	0.8
3	20-40	1.0
4	40-60	1.25
5	60-100	1.5
6	100-150	1.75
7	150-180	2.0
8	180-220	2.3



GK3-A

Size	Thickness	Orifice
1	5-10	0.6
2	10-20	0.8
3	20-40	1.0
4	40-60	1.25
5	60-100	1.5
6	100-150	1.75
7	150-180	2.0
8	180-220	2.3



ANME

Size	Thickness	Orifice
1/32	3-6	0.8
3/64	5-12	1.2
1/16	10-75	1.6
5/64	70-100	2.0
3/32	90-150	2.4
1/8	190-300	3.2



PNME

Size	Thickness	Orifice
1/32	3-6	0.8
3/64	5-12	1.2
1/16	10-75	1.6
5/64	70-100	2.0
3/32	90-150	2.4
1/8	190-300	3.2



ANM

Size	Thickness	Orifice
1/32	3-6	0.8
3/64	5-12	1.2
1/16	10-75	1.6
5/64	70-100	2.0
3/32	90-150	2.4
1/8	190-300	3.2



PNM

Size	Thickness	Orifice
1/32	3-6	0.8
3/64	5-12	1.2
1/16	10-75	1.6
5/64	70-100	2.0
3/32	90-150	2.4
1/8	190-300	3.2



PNME9

Size	Thickness	Orifice
0	3-6	0.8
1	5-12	1.2
2	10-75	1.6
3	70-100	2.0
4	90-150	2.3
5	140-200	2.7
6	190-300	3.1
7	300-500	3.9



PNME18

Size	Thickness	Orifice
0	3-5	0.8
1	5-10	1.0
2	10-25	1.2
3	25-40	1.4
4	40-60	1.5
5	60-100	1.9
6	100-200	2.8
7	200-300	3.2



ARCNM

Thickness	Orifice
3	0.8



ASNМ

Thickness	Orifice
3	0.8



AGNM

Size	Thickness	Orifice
13	13	
19	38	
25	63	



ANME9

Size	Thickness	Orifice
5/32	-500mm	4.0



ASFN

Thickness	Orifice
3	0.8



AFN

Size	Thickness	Orifice
1/32	3-6	0.8
3/64	6-20	1.2
1/16	20-25	1.6



HDFG

Size
#2.4, #2.8, #3.2



BRITISH
AHT

Size	#25, #50, #100
------	----------------



NG

Size	#2, #3, #4
------	------------



CIGWELD
SHA

Size	Thickness	Inter	Exter
1	1/2×20	Propane	18×12
2	1/2×20	Propane	36×12
3	1/2×20	Propane	48×12
4	1/2×20	Propane	48×15




CIGWELD
SHP

Size	Thickness	Inter	Exter
1	1/2×20	Propane	18×12
2	1/2×20	Propane	36×12
3	1/2×20	Propane	48×12
4	1/2×20	Propane	48×15




HARRIS
2290

Size	Threat	Gas	Slot
1H	1/2"-25(F)	Propane	10
2H	1/2"-25(F)	Propane	12
3H	1/2"-25(F)	Propane	22
4H	1/2"-25(F)	Propane	38
5H	1/2"25(F)	Propane	50



BRITISH
SW2/3

Gas	Size
acetylene	#1,2,3,5,7,10,13,18,25,35,45,90




BRITISH
L/W

Gas	Size
acetylene	#1,2,3,5,7,10,13,18,25



CIGWELD

Model	Gas	Thread	Size
551	acetylene	3/8"-26	#4,6,8,10,12,15,20,26,32
554	propane	3/8"-26	#8,12,15,20,32



BRITISH
W-1


Gas	Size
acetylene	#0, #1



BFAHTN




8 x 12 HEATING TIP

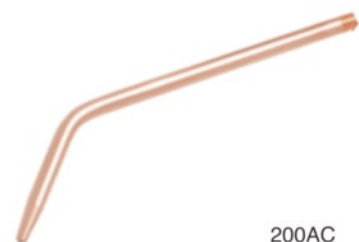

200AC

Size #2, #4, #6, #9, #12




201AC

Size #2, #4, #6, #9, #12



200GLP

Size #2, #4, #6, #9, #12

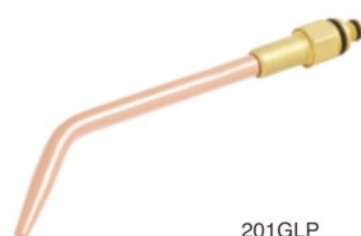

201GLP



W-J

Size #000, #00, #0, #1, #2, #3, #4



ET

Size ET-000, ET-00, ET-1, ET-2, ET-3, ET-4, ET-5



W

Size #3, #5

ATCC



LG

Size #1, #2, #3, #4, #5, #6, #8



H62

GCE/AGA



311

Size #1, #2, #3, #4, #4, #5, #6, #7, #8



337

Size #1, #2, #3, #4, #5



AB

Size	Thickness	Orifice
1	3-10	0.8
2	10-25	1.2
3	25-40	1.4
4	40-60	1.7
5	60-100	2.0
6	100-200	2.8
7	200-300	3.2



M-ZIN

Size	Thickness	Orifice
1	3-10	0.9
2	10-30	1.1
3	30-60	1.4
4	60-100	1.8



ESAB-PM



MESSER/PM

Size	Thickness	Inter	Exter
0	3-6	3-200	0.6
1	6-15		0.8
2	15-25		1.0
3	25-40		1.1
4	40-60		1.2
5	60-100	200-300	1.7
6	100-200		1.8
7	200-250		2.3
8	250-300		2.5

Size	Thickness	Inter	Exter
0	3-10	3-100	0.7
1	7-15		0.8
2	15-25		0.9
3	25-40		1.0
4	40-60		1.2
5	60-100	100-300	1.7
6	100-200		1.8
7	200-250		2.5
8	250-300		2.9



PHNM



ADAPTOR(G03-V)



4-SPIG



317



502B



502C



2890F



A-MID



AC-CH70D



AC-N



CUT-NOZZLE-PB



CUT-NOZZLE-AC



GROOVE-CUT-AC



GROOVE-CUT-PB



KALTENNORDHEIM-CUT



GROOVE-HEAT-AC-MC



GROOVE-HEAT-AC



GROOVE-HEAT-PB



GROOVE-HEAT-PBMC



KALTENNORDHEIM-HEAT



PR-CH70D



PR-N1



PRX-CUT



PRX-HEAT



RING-CUT



RING-HEAT-AC



RING-HEAT-PB



UM4



F6A



Cx089 /G02-200 铜



Cx090 /G02-200 铝



Cx091 /G02-200 铜105°



Cx092 /G02-200 锁扣



Cx093 /G02-250A 铝



Cx094 /G02-250B 铝



Cx095 /G02-250A 铜



Cx096 /G02-250B 铜



Cx097 /G02-250A 反扞手 铝



Cx098 /62-3



Cx099 /63-2铜



Cx100 /63-2铝



Cx101/GLOOR



Cx102/G02-100



Cx103/泰式小割炬



Cx104/M型割炬



Cx105/6型丙烷



Cx106/6型乙炔



Cx107/G02-200-L



Cx108/G02-250-L



Cx109/G02-250-180°



Cx110/等压式烤炬



Cx111/62-3-A



Cx112/62-3-B



Cx113/63-2-A



Cx114/63-2-B



Cx115/1# 3# 5# 7#



Cx116/1# 2# 3#



ACE
Cx117



OX
Cx118



ACE
Cx119



OX
Cx120



ACE
Cx121



OX
Cx122



ACE
Cx123



OX
Cx124



ACE
Cx125



OX
Cx126



ACE
Cx127



OX
Cx128



OX
Cx129



ACE
Cx130



OX
Cx131



ACE
Cx132



ACE
Cx133



OX
Cx134



ACE
Cx135



OX
Cx136



3/8
Cx137



1/4
Cx138



Cx139



Cx140



Cx141



Cx142



Cx143



Cx144



Cx145



Cx146



OX
Cx147



ACE
Cx148



5Pas Flint Stone
Cx149



Triangle Flnt Stone
Cx150



手枪式点火枪
Triiple-Flint
Spark Lighter
Cx151



方头点火器
Triiple-Flint
Spark Lighter
Cx152



多头点火器
Triiple-Flint
Spark Lighter
Cx153



圆头点火器
Single-Flint
Spark Lighter
Cx154



日式500A
Cx155



日式500A
Cx156



TC-08
Cx157



TC-08A
Cx158



TC-10
Cx159



TC-12A
Cx160

G02等压式割嘴性能表

割嘴号	气割钢板厚度	气体压力		气体消耗量		气割速度
		氧气	乙炔	氧气	乙炔	
1	5-15	≥3	>0.3	2.5-3	350-450	450-550
2	15-30	≥3.5	>0.3	3.5-4.5	450-500	350-450
3	30-50	≥4.5	>0.3	5.5-6.5	450-500	250-350
4	50-100	≥6	>0.5	9-11	500-600	230-250
5	100-150	≥7	>0.5	10-13	500-600	200-230
6	150-200	≥8	>0.5	13-16	600-700	170-200
7	200-250	≥9	>0.5	16-23	800-900	150-170
8	250-300	≥10	>0.5	25-30	900-1000	90-150
9	300-350	≥11	>0.5	----	1000-1300	70-90
10	350-400	≥13	>0.5	----	1300-1600	50-70

等压式割嘴，具有寿命长、效能高、安全可靠、制造精密、30° 配合面可与国外产品互换等特点。

GK1乙炔，GK3丙烷快速割嘴性能表（气压7-8kg/cm²）

割嘴号	气割钢板厚度	气割速度	气体消耗量		气割速度
			氧气	燃气	
1	5-15	750-500	7-8	>0.3	1250
2	10-20	600-380	7-8	>0.3	2230
3	20-40	500-350	7-8	>0.3	3480
4	40-60	420-300	7-8	>0.3	5440
5	60-100	320-200	7-8	>0.3	7840
6	100-150	260-140	7-8	>0.3	10680
7	150-180	180-130	7-8	>0.3	13900

等压式GK1 Gk3快速割嘴，是一种优质的割嘴，它以不锈钢管作为切割氧喷管，以此获得高速切割氧流。气割钢板速度比用等压式割嘴提高20-30%。氧割光洁度能达到▽3-▽4。（GK1快速割嘴是用乙炔气体作为燃气的割嘴，GK3快速割嘴是用丙烷气体作为燃气的割嘴。）